

United
States
of
America

To Promote the Progress

of Science and Useful Arts

The Director

of the United States Patent and Trademark Office has received an application for a patent for a new and useful invention. The title and description of the invention are enclosed. The requirements of law have been complied with, and it has been determined that a patent on the invention shall be granted under the law.

Therefore, this United States

Patent

grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.

Katherine Kelly Vidal

DIRECTOR OF THE UNITED STATES PATENT AND TRADEMARK OFFICE

Maintenance Fee Notice

If the application for this patent was filed on or after December 12, 1980, maintenance fees are due three years and six months, seven years and six months, and eleven years and six months after the date of this grant, or within a grace period of six months thereafter upon payment of a surcharge as provided by law. The amount, number and timing of the maintenance fees required may be changed by law or regulation. Unless payment of the applicable maintenance fee is received in the United States Patent and Trademark Office on or before the date the fee is due or within a grace period of six months thereafter, the patent will expire as of the end of such grace period.

Patent Term Notice

If the application for this patent was filed on or after June 8, 1995, the term of this patent begins on the date on which this patent issues and ends twenty years from the filing date of the application or, if the application contains a specific reference to an earlier filed application or applications under 35 U.S.C. 120, 121, 365(c), or 386(c), twenty years from the filing date of the earliest such application (“the twenty-year term”), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b), and any extension as provided by 35 U.S.C. 154(b) or 156 or any disclaimer under 35 U.S.C. 253.

If this application was filed prior to June 8, 1995, the term of this patent begins on the date on which this patent issues and ends on the later of seventeen years from the date of the grant of this patent or the twenty-year term set forth above for patents resulting from applications filed on or after June 8, 1995, subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b) and any extension as provided by 35 U.S.C. 156 or any disclaimer under 35 U.S.C. 253.

(12) **United States Patent**
Burke

(10) **Patent No.:** **US 12,002,051 B2**
(45) **Date of Patent:** **Jun. 4, 2024**

(54) **TRANSMITTER FOR TRANSMITTING A SECURE ACCESS SIGNAL**

(71) Applicant: **CPC Patent Technologies Pty Ltd.,**
Surfers Paradise (AU)

(72) Inventor: **Christopher John Burke,** Hurstville (AU)

(73) Assignee: **CPC Patent Technologies Pty Ltd.,**
Surfers Paradise (AU)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/060,327**

(22) Filed: **Nov. 30, 2022**

(65) **Prior Publication Data**
US 2023/0099358 A1 Mar. 30, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/167,996, filed on Feb. 4, 2021, now abandoned, which is a continuation (Continued)

Foreign Application Priority Data

Oct. 22, 2007 (AU) 2007905760
Feb. 13, 2008 (AU) 2008900672

(51) **Int. Cl.**
G06Q 20/40 (2012.01)
G06Q 20/32 (2012.01)

(Continued)

(52) **U.S. Cl.**
CPC ... **G06Q 20/40145** (2013.01); **G06Q 20/3278** (2013.01); **G06Q 20/352** (2013.01); (Continued)

(58) **Field of Classification Search**

None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,700,055 A * 10/1987 Kashkashian, Jr. .. G06Q 20/363 902/4

4,924,078 A 5/1990 Sant' Anselmo et al. (Continued)

FOREIGN PATENT DOCUMENTS

EP 1637957 A1 3/2006
JP 2007-247346 A 9/2007

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 15/213,661, "Notice of Allowance", Feb. 6, 2020, 11 pages.

(Continued)


Primary Examiner — Muhammad Adnan

(74) *Attorney, Agent, or Firm* — TraskBritt

(57) **ABSTRACT**

A transmitter for transmitting a secure access signal to a system for providing secure access to a controlled item is disclosed. The access is dependent on information contained in the secure access signal. The transmitter comprises a biometric sensor for receiving a biometric signal and a processor for matching the biometric signal against members of a database of biometric signatures. The transmitter comprises enabling means for enabling an inductive circuit, based on the matching of the biometric signal, to transmit the secure access signal conveying the information to the system upon the inductive circuit being placed within range of a radio frequency field emitted by the system.

21 Claims, 15 Drawing Sheets

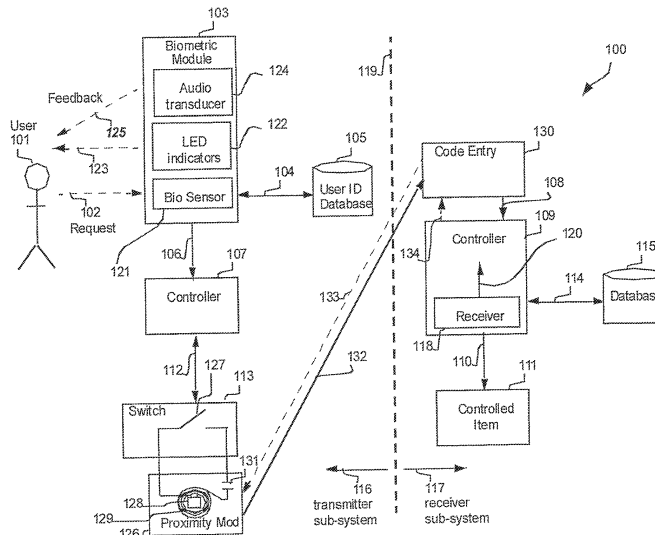

Related U.S. Application Data

of application No. 16/717,270, filed on Dec. 17, 2019, now Pat. No. 10,949,849, which is a continuation of application No. 15/213,661, filed on Jul. 19, 2016, now Pat. No. 10,685,353, which is a continuation of application No. 14/308,091, filed on Jun. 18, 2014, now abandoned, which is a continuation of application No. 12/738,663, filed as application No. PCT/AU2008/001490 on Oct. 8, 2008, now abandoned.

(51) **Int. Cl.**

G06Q 20/34 (2012.01)
G06V 40/10 (2022.01)
G07C 9/25 (2020.01)
G07C 9/26 (2020.01)
G07F 7/08 (2006.01)
H04L 9/06 (2006.01)
H04L 9/08 (2006.01)
H04L 9/30 (2006.01)
H04L 9/32 (2006.01)
G07C 9/00 (2020.01)

(52) **U.S. Cl.**

CPC **G06Q 20/354** (2013.01); **G06V 40/10** (2022.01); **G07C 9/257** (2020.01); **G07F 7/0893** (2013.01); **H04L 9/0625** (2013.01); **H04L 9/0631** (2013.01); **H04L 9/0861** (2013.01); **H04L 9/302** (2013.01); **H04L 9/3231** (2013.01); **H04L 9/3247** (2013.01); **G07C 9/00182** (2013.01); **G07C 9/00563** (2013.01); **G07C 9/26** (2020.01); **H04L 2209/56** (2013.01); **H04L 2209/805** (2013.01); **H04L 2463/102** (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

4,972,475 A * 11/1990 Sant' Anselmo G09C 5/00
 380/54
 5,266,781 A 11/1993 Warwick et al.
 5,280,527 A * 1/1994 Gullman G07C 9/29
 713/184
 5,331,176 A 7/1994 Sant' Anselmo et al.
 5,590,038 A * 12/1996 Pitroda G06Q 20/4093
 705/41
 5,770,843 A * 6/1998 Rose G06Q 20/347
 235/382
 6,182,891 B1 * 2/2001 Furuhashi G06K 19/08
 235/379
 6,315,195 B1 * 11/2001 Ramachandran G06K 19/08
 235/487
 6,318,633 B1 11/2001 Drexler
 6,588,658 B1 7/2003 Blank
 6,775,776 B1 * 8/2004 Vogt G06F 21/32
 713/182
 6,941,279 B1 9/2005 Sullivan
 6,957,337 B1 * 10/2005 Chainer H04L 9/3231
 713/168
 7,083,094 B2 * 8/2006 Cooper G06Q 20/342
 235/492
 7,207,480 B1 * 4/2007 Geddes G06Q 20/40
 235/382
 7,239,226 B2 * 7/2007 Berardi G06Q 20/3226
 340/5.4
 7,252,240 B1 * 8/2007 Jones G06K 19/07743
 235/441
 7,328,850 B2 * 2/2008 Sines H04K 3/62
 235/487
 7,374,079 B2 * 5/2008 Nam G07F 7/0886
 235/492

7,484,659 B2 * 2/2009 Johans G06Q 20/347
 235/382
 7,512,567 B2 * 3/2009 Bommel G06Q 20/204
 705/64
 7,539,156 B2 * 5/2009 Leung H04L 67/04
 455/435.2
 7,640,041 B2 * 12/2009 Ragan H04M 1/72448
 360/137
 7,644,042 B2 * 1/2010 Ramavarjula G06Q 20/40
 705/35
 7,731,086 B2 * 6/2010 Saunders G07B 15/04
 235/382
 7,778,654 B2 * 8/2010 Ahn H04L 12/281
 455/426.2
 7,797,237 B2 * 9/2010 Kim G06Q 20/322
 705/40
 7,814,332 B2 * 10/2010 Beenau H04L 9/3231
 713/169
 7,949,609 B2 * 5/2011 Colella G06Q 30/06
 705/64
 7,962,349 B2 * 6/2011 Silverbrook G07D 7/004
 705/2
 7,992,792 B2 * 8/2011 Van Rensburg G06Q 20/326
 705/16
 8,002,175 B2 * 8/2011 Kuriyama G06K 7/1095
 235/487
 8,049,597 B1 * 11/2011 Murakami G06V 40/10
 340/5.1
 8,089,339 B2 1/2012 Mikan et al.
 8,152,056 B2 * 4/2012 Johans G06Q 30/06
 235/380
 8,160,959 B2 * 4/2012 Rackley, III G06Q 20/10
 235/380
 8,229,852 B2 * 7/2012 Carlson G06Q 20/382
 705/44
 8,299,895 B2 * 10/2012 Harris G08C 17/02
 340/5.72
 8,528,812 B2 * 9/2013 Gannon G06Q 20/4012
 235/379
 8,635,661 B2 * 1/2014 Shahbazi H04L 63/083
 726/1
 8,646,686 B2 * 2/2014 Bullwinkel G07C 9/27
 235/487
 8,676,249 B2 * 3/2014 Rosenberg B60B 1/006
 455/418
 8,768,838 B1 * 7/2014 Hoffman G06Q 40/00
 705/72
 8,856,359 B2 * 10/2014 Guedalia H04L 61/4547
 709/227
 8,869,253 B2 * 10/2014 Atkinson G06F 21/42
 726/8
 8,934,865 B2 * 1/2015 Nandagopal G06Q 20/42
 713/168
 9,830,756 B1 * 11/2017 Getachew G07C 9/27
 10,055,714 B2 * 8/2018 Zhou G06Q 20/36
 10,445,837 B2 * 10/2019 Andringa G06Q 40/00
 2001/0034717 A1 10/2001 Whitworth
 2002/0067259 A1 * 6/2002 Fufidio G07C 9/28
 340/541
 2002/0096561 A1 7/2002 Sullivan
 2002/0144128 A1 10/2002 Rahman et al.
 2002/0167500 A1 * 11/2002 Gelbman G06K 19/07758
 345/204
 2003/0112120 A1 * 6/2003 Siefert G06F 21/34
 340/5.53
 2003/0119568 A1 * 6/2003 Menard H04W 52/0229
 455/572
 2003/0129965 A1 * 7/2003 Siegel G06V 10/94
 455/411
 2003/0130955 A1 7/2003 Hawthorne
 2003/0220876 A1 * 11/2003 Burger G06K 19/0719
 705/50
 2003/0226041 A1 * 12/2003 Palmer G07F 7/1008
 705/76
 2004/0049451 A1 * 3/2004 Berardi G06Q 20/327
 705/39

(56)

References Cited

U.S. PATENT DOCUMENTS

- 2004/0117627 A1 * 6/2004 Brewington H04N 1/32133
713/176
- 2004/0210515 A1 * 10/2004 Hughes G06Q 20/10
705/39
- 2004/0232220 A1 * 11/2004 Beenau G06Q 20/4014
235/380
- 2004/0235450 A1 * 11/2004 Rosenberg H04M 1/0254
455/406
- 2004/0256451 A1 12/2004 Goman et al.
- 2005/0001711 A1 * 1/2005 Doughty G07C 9/257
340/5.82
- 2005/0012593 A1 * 1/2005 Harrod B60R 25/2063
340/5.72
- 2005/0012594 A1 * 1/2005 Shim B60R 25/24
340/5.72
- 2005/0130735 A1 * 6/2005 Ellis G07F 17/32
463/25
- 2005/0137977 A1 * 6/2005 Wankmueller G06Q 20/341
705/40
- 2005/0225430 A1 * 10/2005 Seifert G06F 21/34
340/5.82
- 2005/0240778 A1 * 10/2005 Saito H04W 12/068
713/186
- 2005/0253683 A1 * 11/2005 Lowe G07C 9/257
340/5.61
- 2006/0161789 A1 * 7/2006 Doughty G06Q 20/341
713/186
- 2006/0174353 A1 * 8/2006 Ryal G11B 20/00275
726/32
- 2006/0210126 A1 * 9/2006 Cho G07C 9/37
382/124
- 2006/0237427 A1 * 10/2006 Logan G07C 9/37
219/401
- 2006/0278704 A1 * 12/2006 Saunders G07B 15/04
235/382
- 2006/0280149 A1 * 12/2006 Kuhl G06K 7/01
340/539.23
- 2007/0001582 A1 1/2007 Shin et al.
- 2007/0001852 A1 * 1/2007 Jalkanen G06F 21/10
340/572.1
- 2007/0024551 A1 * 2/2007 Gelbman G06K 19/07758
345/85
- 2007/0057038 A1 * 3/2007 Gannon G06K 19/08
235/380
- 2007/0090918 A1 4/2007 Engstrom et al.
- 2007/0095900 A1 * 5/2007 Kingsley-Hefty G06F 21/32
235/382
- 2007/0102510 A1 5/2007 Beemer et al.
- 2007/0109101 A1 * 5/2007 Colby G06K 19/0723
340/10.41
- 2007/0118474 A1 * 5/2007 Tushie G06Q 20/341
705/76
- 2007/0123299 A1 * 5/2007 Ragan H04M 1/72403
455/556.1
- 2007/0131759 A1 * 6/2007 Cox G06K 19/077
235/383
- 2007/0141984 A1 * 6/2007 Kuehnel H04W 4/80
455/41.2
- 2007/0174206 A1 * 7/2007 Colella G06Q 20/40
705/64
- 2007/0185718 A1 * 8/2007 Di Mambro G07C 9/37
704/270.1
- 2007/0239603 A1 * 10/2007 Lasater G06Q 40/00
705/41
- 2007/0274575 A1 * 11/2007 Russo G06V 40/1335
382/115
- 2007/0290792 A1 * 12/2007 Tsuchimochi G07C 9/00309
340/5.72
- 2007/0295805 A1 * 12/2007 Ramachandran G06Q 40/00
235/379
- 2008/0128513 A1 * 6/2008 Hammad G06Q 20/325
235/492
- 2008/0229400 A1 * 9/2008 Burke H04L 63/0861
726/7
- 2008/0238610 A1 * 10/2008 Rosenberg G06Q 20/20
705/26.1
- 2009/0055319 A1 * 2/2009 Raheman G07C 9/257
705/44
- 2009/0212781 A1 * 8/2009 Bertness G06Q 99/00
324/426
- 2010/0049659 A1 * 2/2010 Cassone G06F 21/32
705/64
- 2010/0109914 A1 5/2010 Tieman et al.
- 2010/0253470 A1 * 10/2010 Burke H04L 9/0631
340/5.82
- 2010/0332392 A1 * 12/2010 Ueno G06Q 20/40
340/5.82
- 2011/0276609 A1 * 11/2011 Denison G07F 9/001
707/812
- 2012/0150601 A1 * 6/2012 Fisher G06Q 30/0253
705/14.23
- 2012/0205450 A1 * 8/2012 Poidomani G06K 19/07318
235/492
- 2014/0319212 A1 * 10/2014 Gannon G06Q 20/3278
235/380
- 2016/0086161 A1 * 3/2016 Zhou G06F 3/04886
705/44
- 2016/0239694 A1 * 8/2016 Chin G07C 9/00896
- 2018/0068311 A1 * 3/2018 Lesesky G06Q 20/405
- 2018/0158036 A1 * 6/2018 Zhou G06F 1/163
- 2022/0299860 A1 * 9/2022 Wang G06V 20/58

FOREIGN PATENT DOCUMENTS

WO 2005/036357 A2 4/2005
WO 2008/031143 A1 3/2008
WO 2008/043125 A1 4/2008

OTHER PUBLICATIONS

Australian Patent Application No. 2012203563, Patent Examination Report No. 1, issued Jan. 11, 2013.

Australian Patent Application No. 2014240323, Australian Patent Office Patent Examination Report No. 1, mailed Feb. 4, 2015.

Australian Patent Office Examiner's first report on patent application No. 2008316289, dated Aug. 12, 2010 (2 pages).

Australian Patent Office International-Type Search Report, National Application No. 2008900672, mailed Jul. 9, 2008 (3 pages).

Chinese Patent Application No. 200880122424.8, First Office Action mailed Jul. 18, 2012.

Chinese Patent Application No. 200880122424.8, Fourth Office Action mailed Jun. 19, 2014.

Chinese Patent Application No. 200880122424.8, Second Office Action mailed Mar. 22, 2013.

Chinese Patent Application No. 200880122424.8, Third Office Action mailed Nov. 12, 2013.

European Patent Application No. 08800125, Supplemental European Search Report, issued Jan. 8, 2013.

European Patent Application No. 08800125.0, Examination Report Communication pursuant to Article 94(3) EPC, mailed Jun. 9, 2015.

Extended European Search Report, EP Application No. 17189130, dated Nov. 17, 2017.

Humphrey Cheung, Multi-chip RFID packages to substitute multiple RFID cards, Tom's Hardware (website), dated Feb. 14, 2006, available at: <https://www.tomshardware.com/news/rfid-mit-rsa-2006_2270.html>, accessed Feb. 27, 2017, all pages.

PCT International Preliminary Report on Patentability, PCT International Application PCT/AU2008/001490, issued Apr. 27, 2010 (9 pages).

PCT International Search Report of PCT International Application No. PCT/AU2008/004190, mailed Nov. 21, 2008, all pages.

Singapore Patent Application No. 201101591-4, Examination Report, mailed Oct. 16, 2012.

Written Opinion for Corresponding Singapore Application No. 201101591-4, mailed Aug. 16, 2011.

(56)

References Cited

OTHER PUBLICATIONS

Written Submission by the European Patent Office in related EP Application No. 0880125.0 mailed Dec. 21, 2016, all pages.
European Communication pursuant to Article 94(3) EPC for European Application No. 17189130, dated Aug. 20, 2021, 6 pages.

* cited by examiner

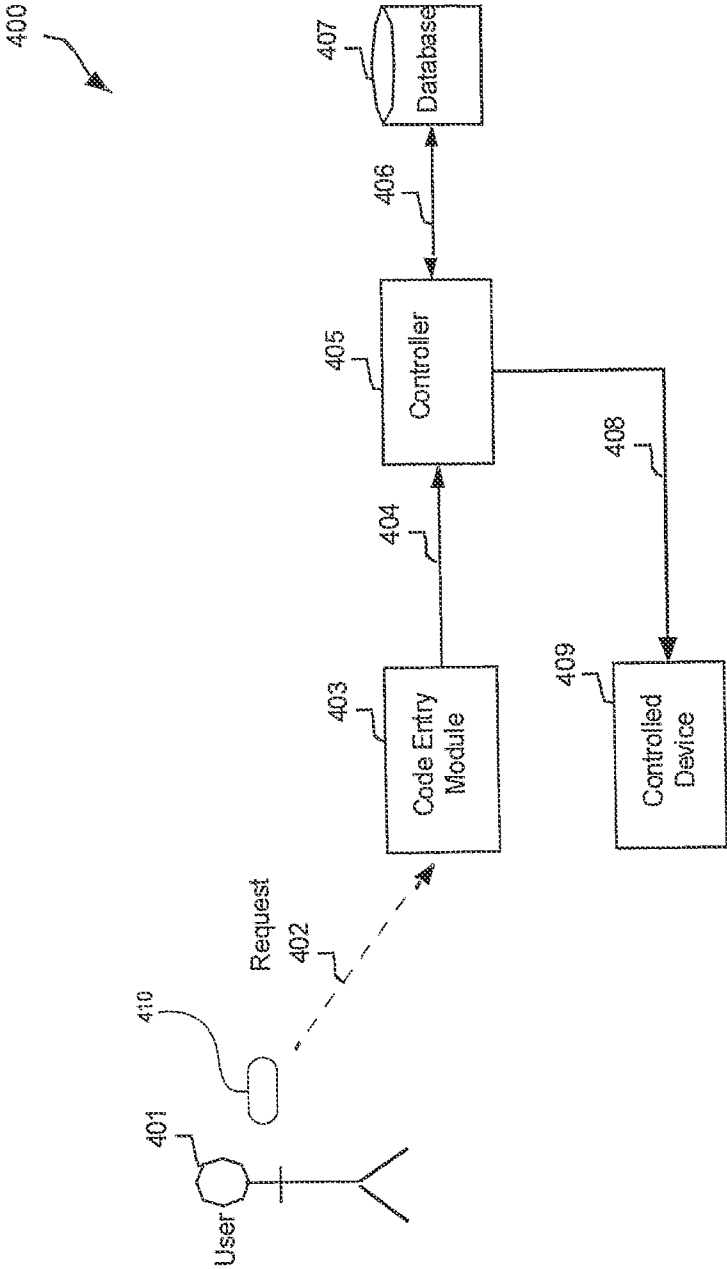


FIG. 1

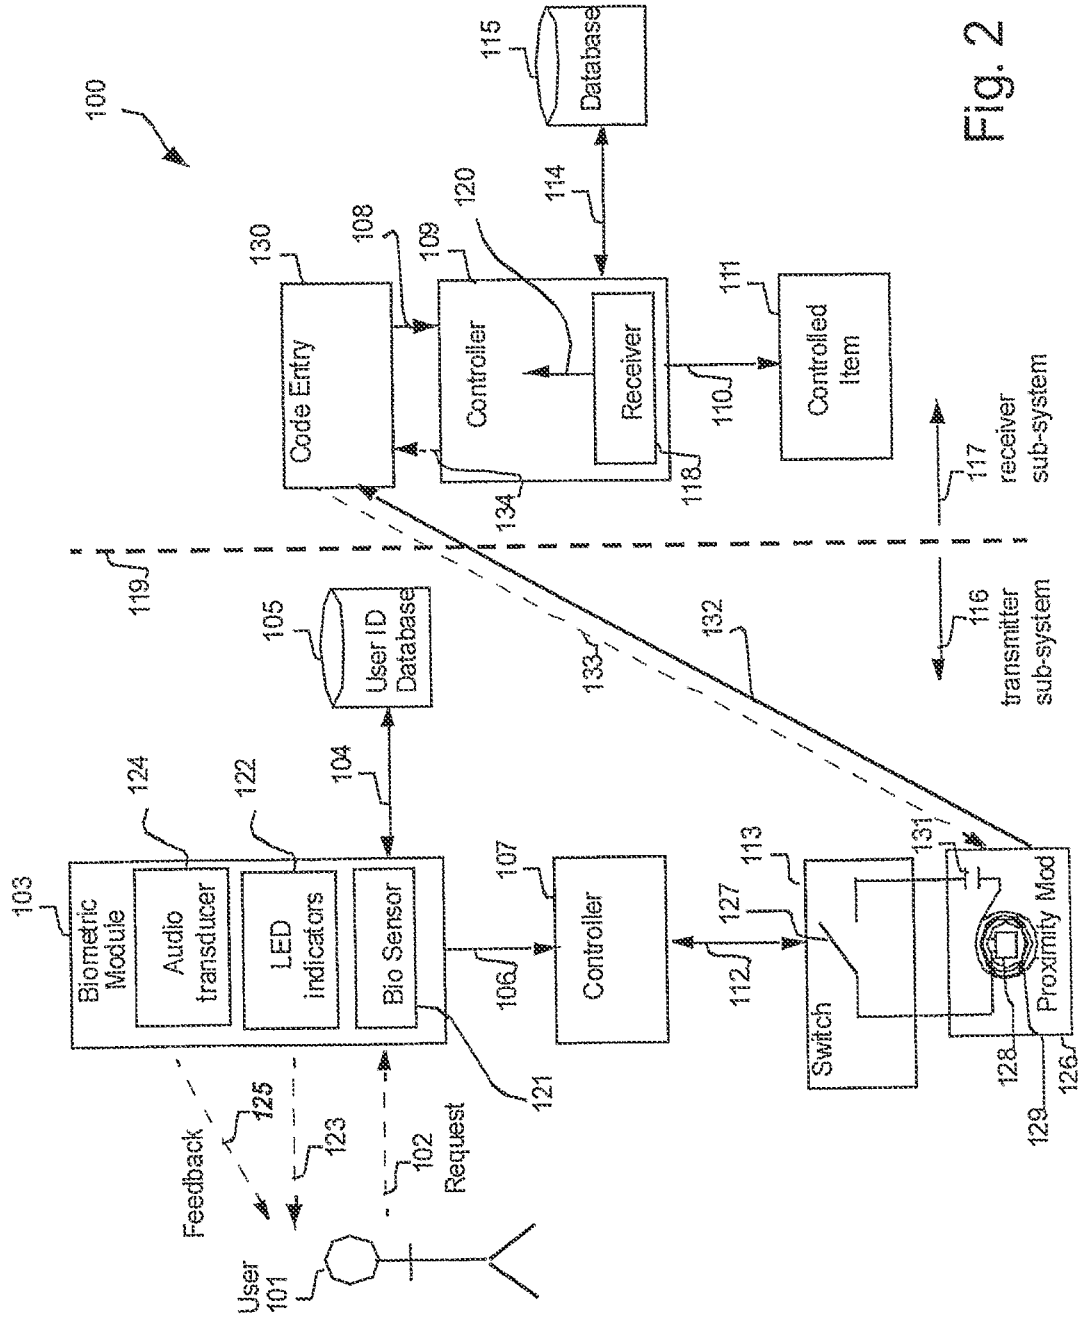


Fig. 2

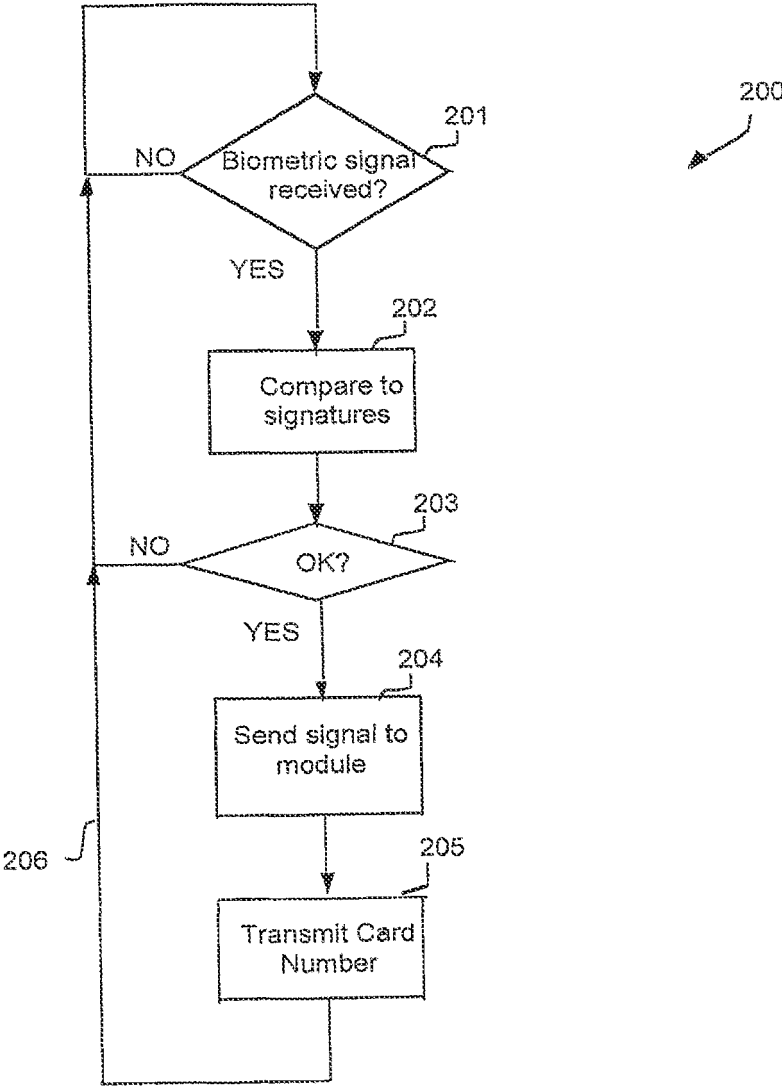


Fig. 3

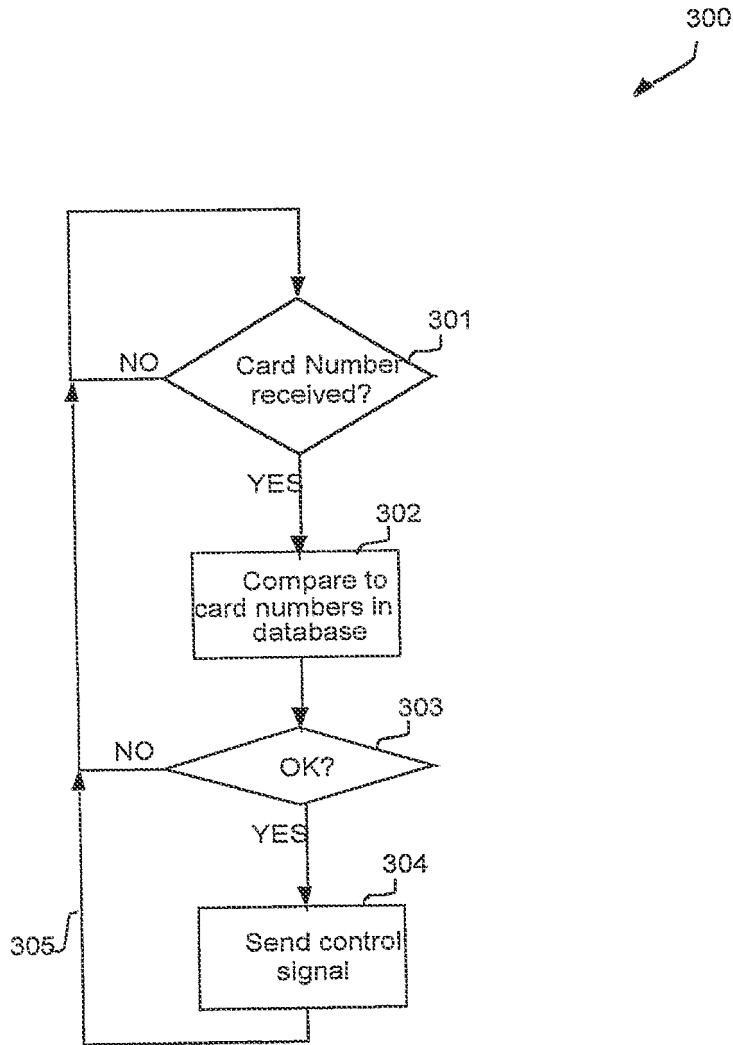


Fig. 4

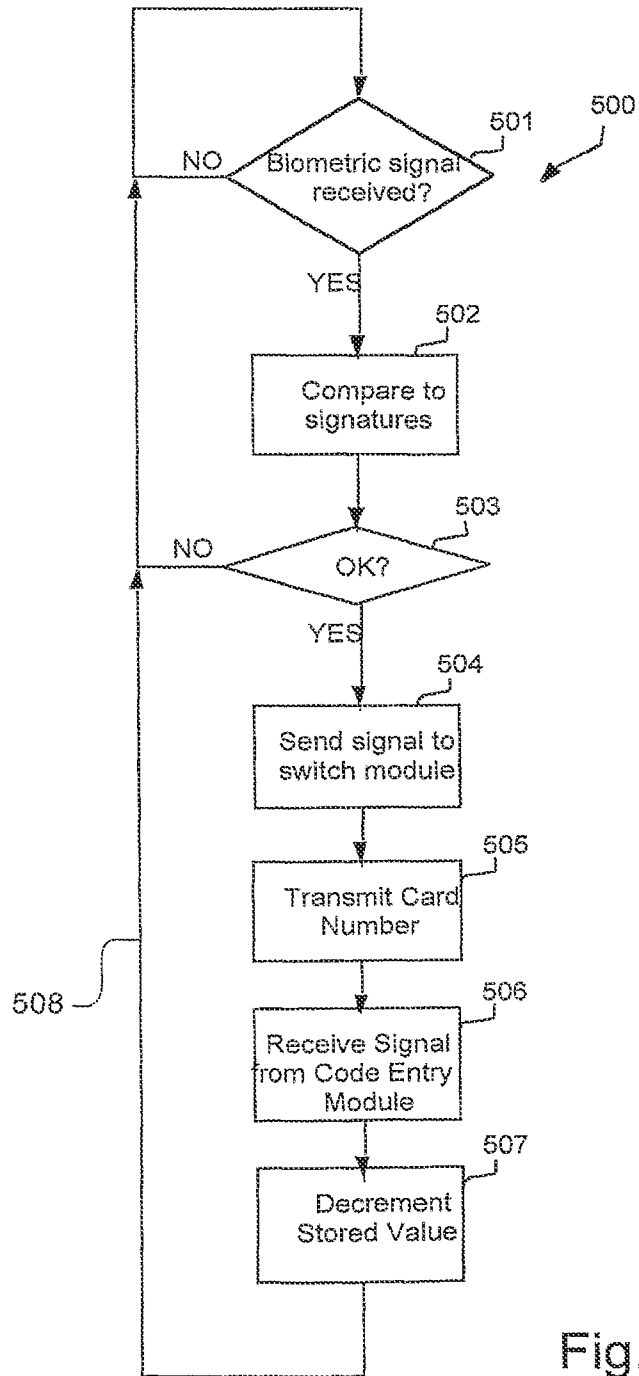
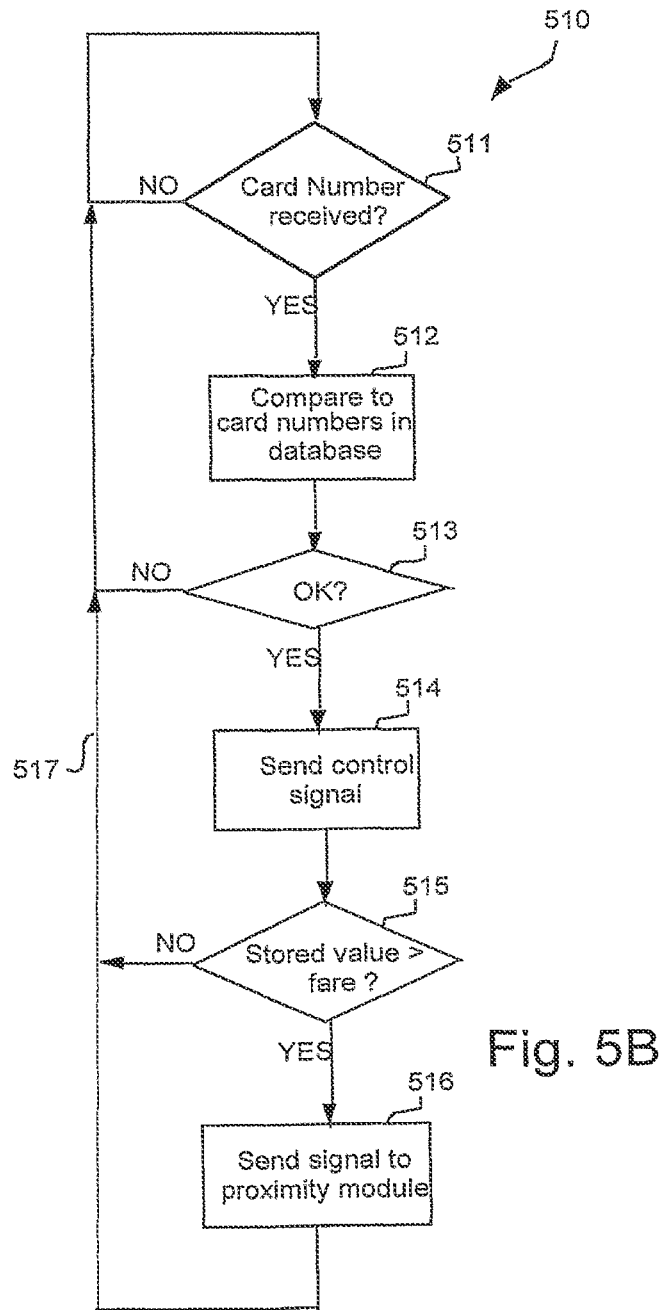


Fig. 5A



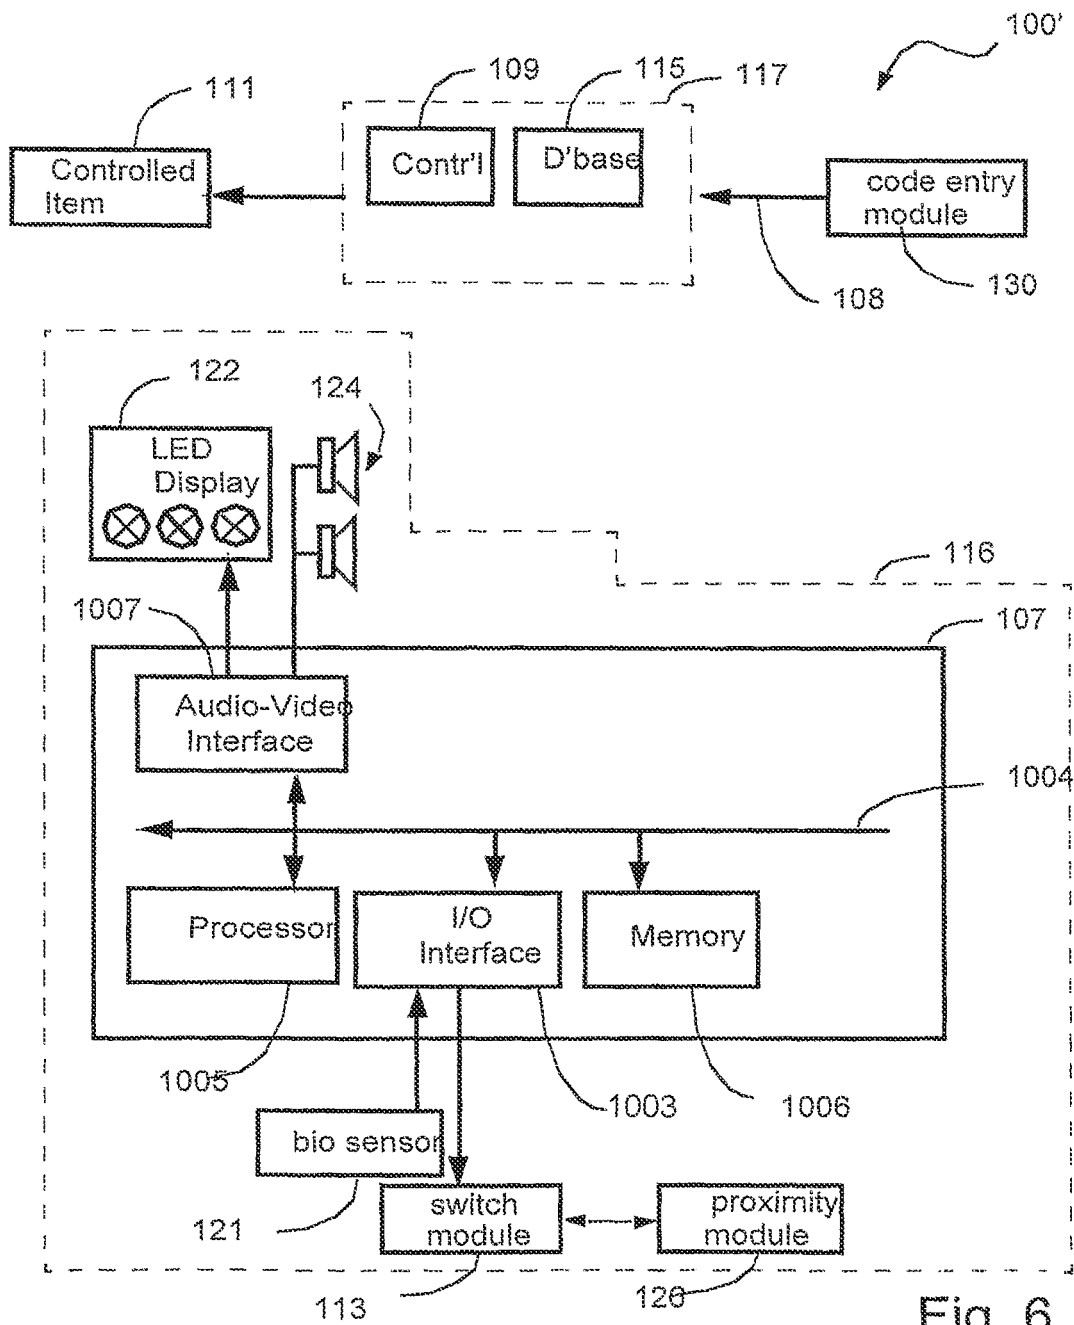


Fig. 6

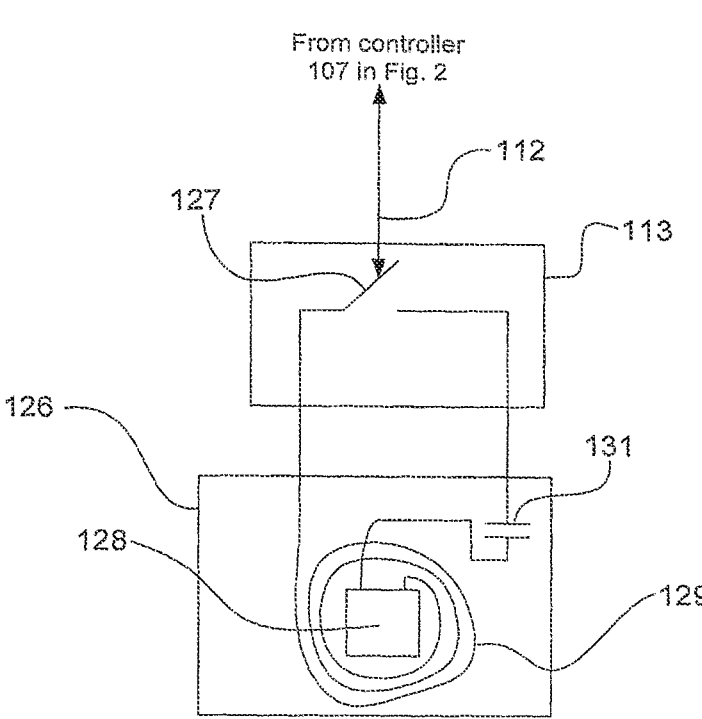


Fig. 7A

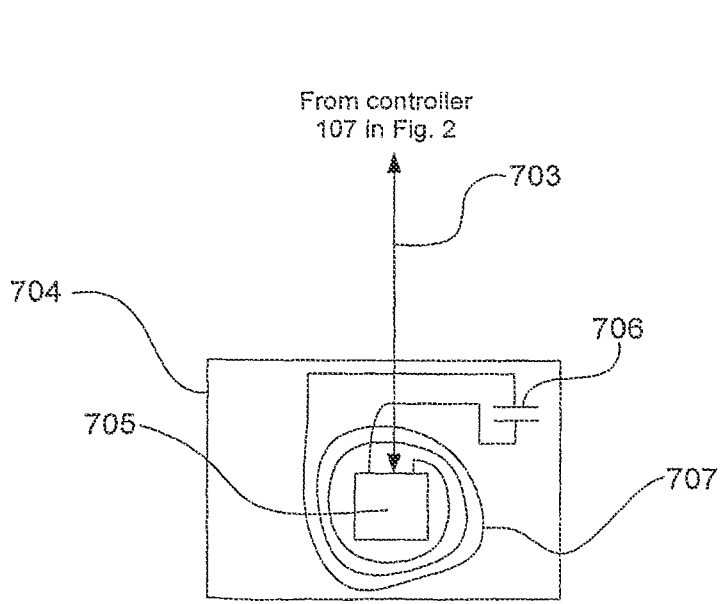




Fig. 7B



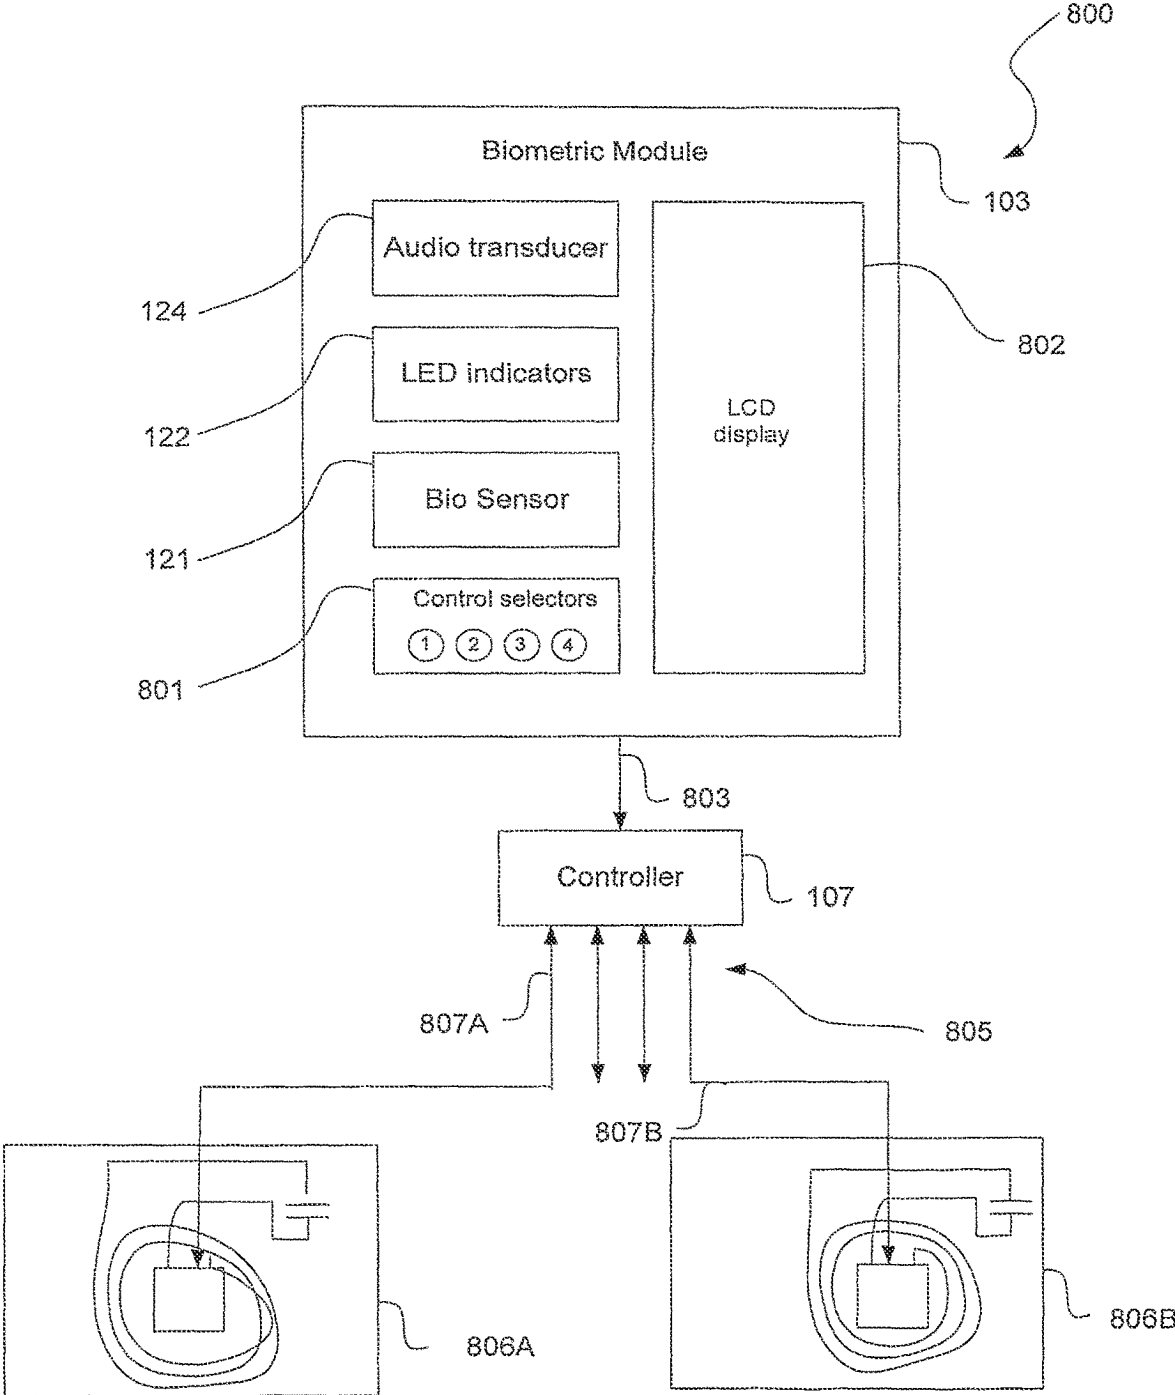


Fig. 8

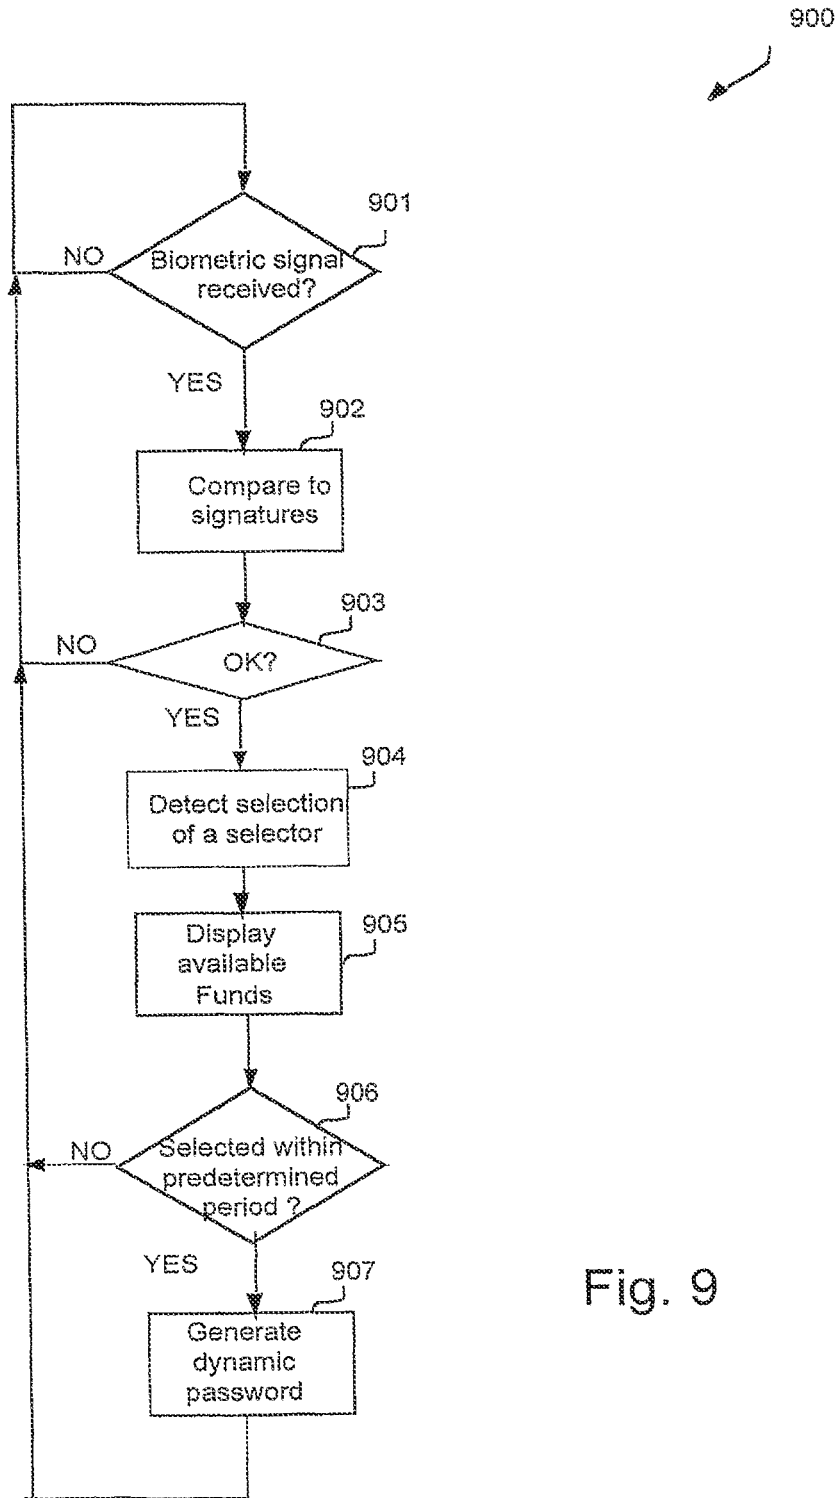


Fig. 9

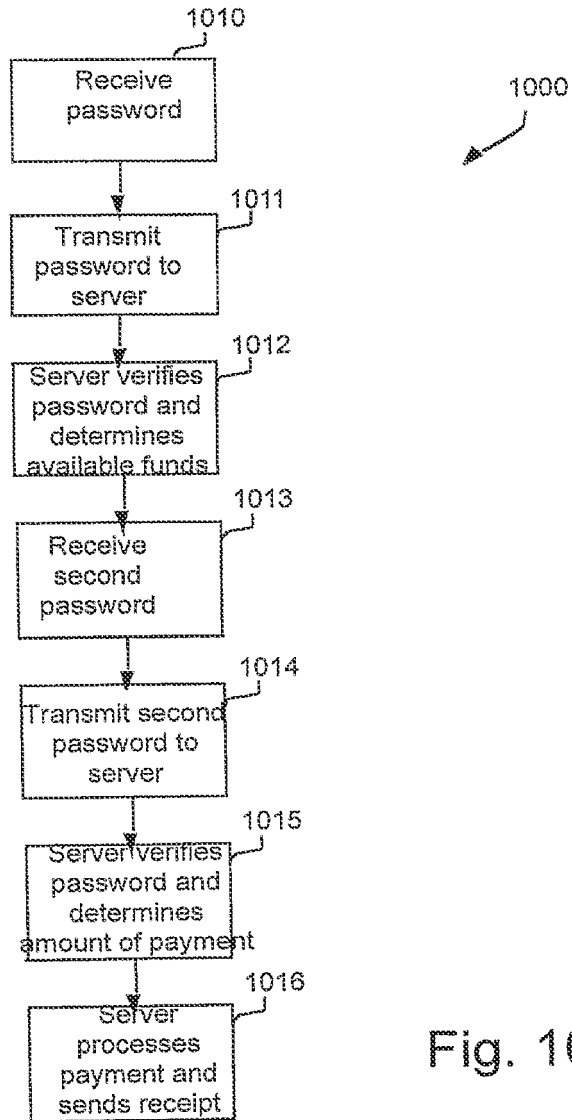


Fig. 10

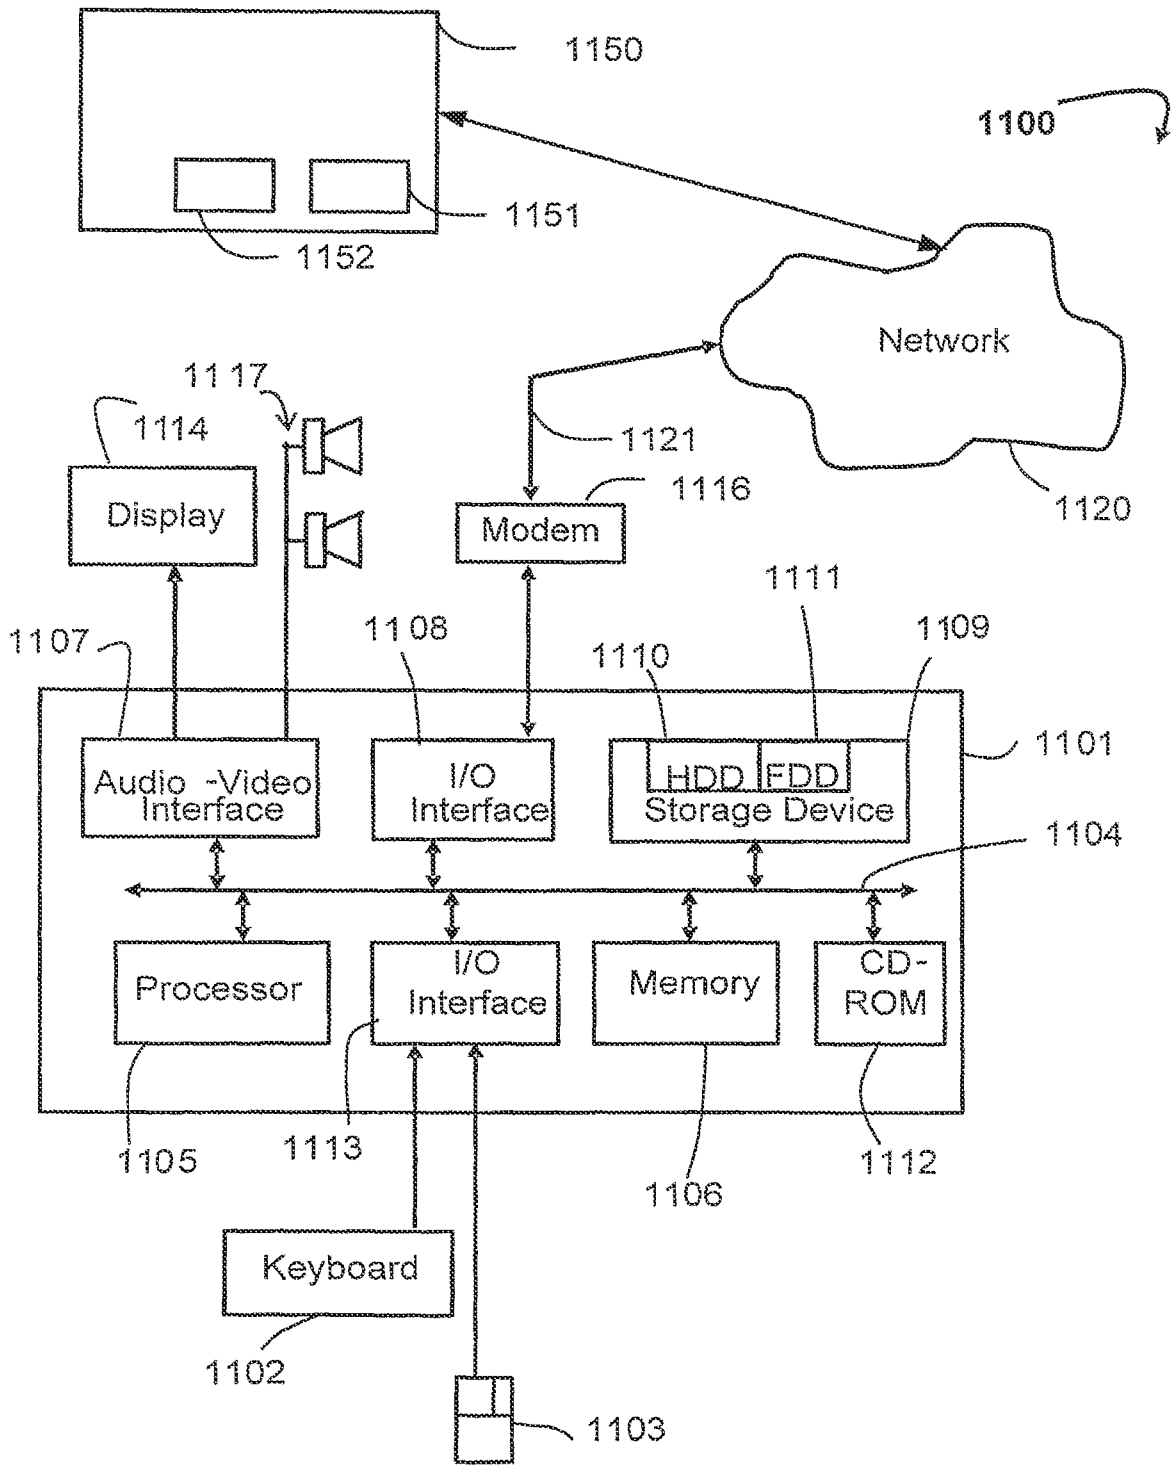


Fig.11

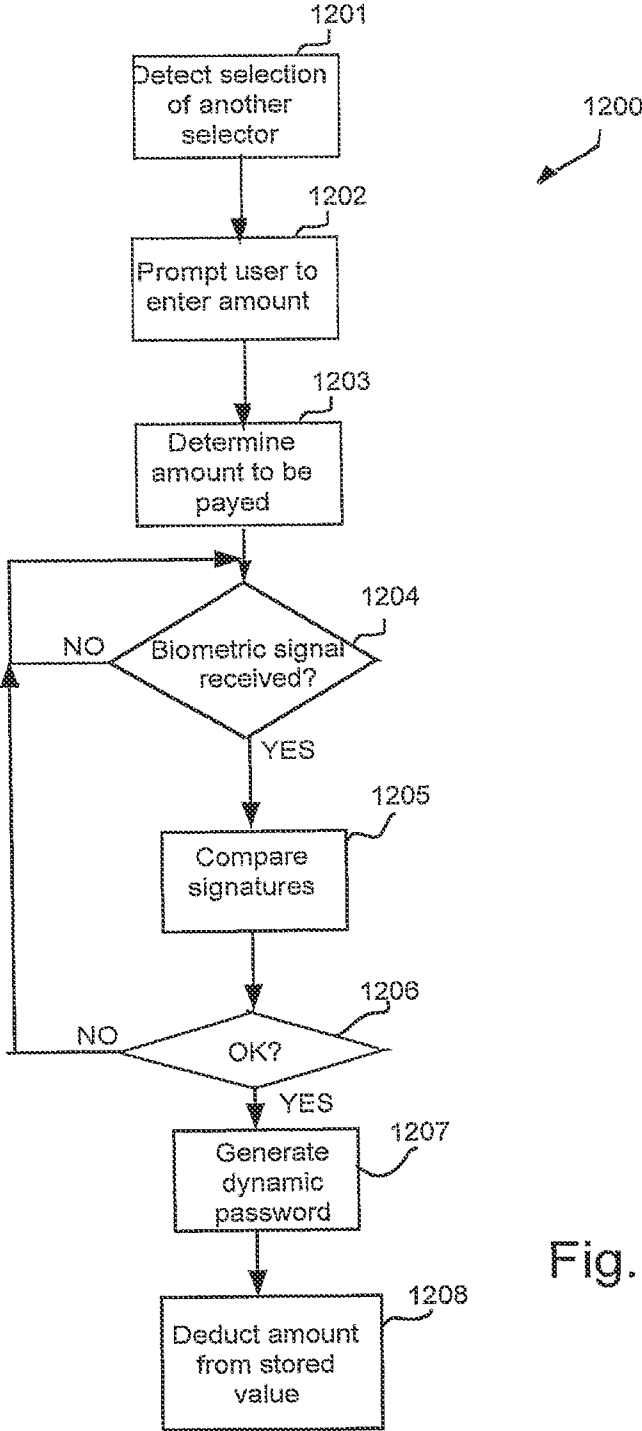


Fig. 12

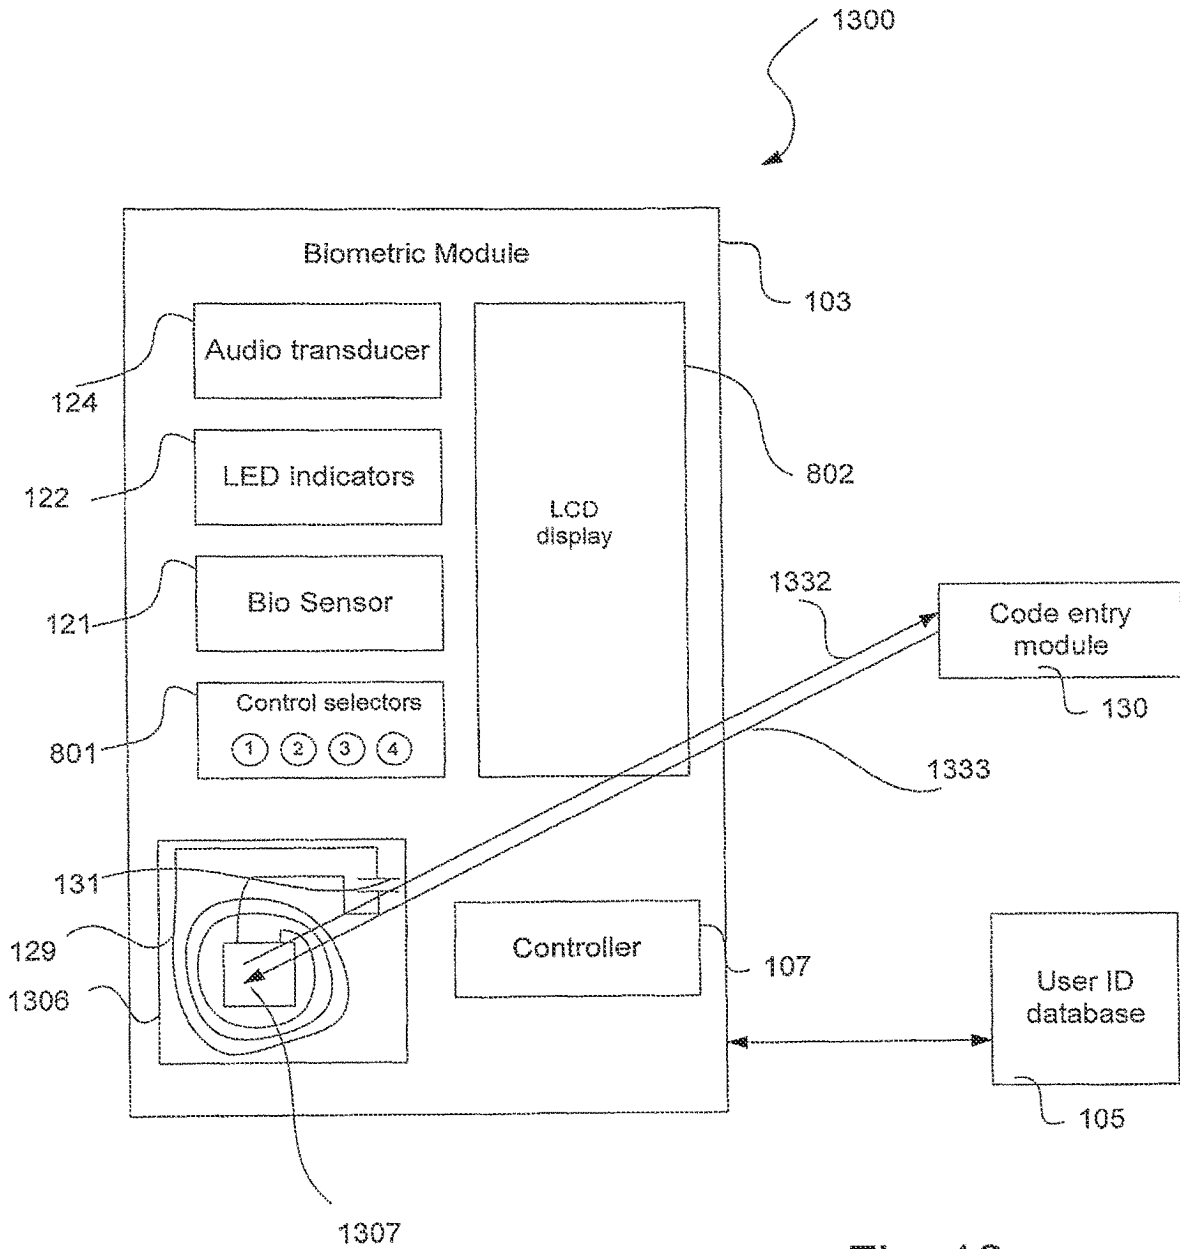


Fig. 13

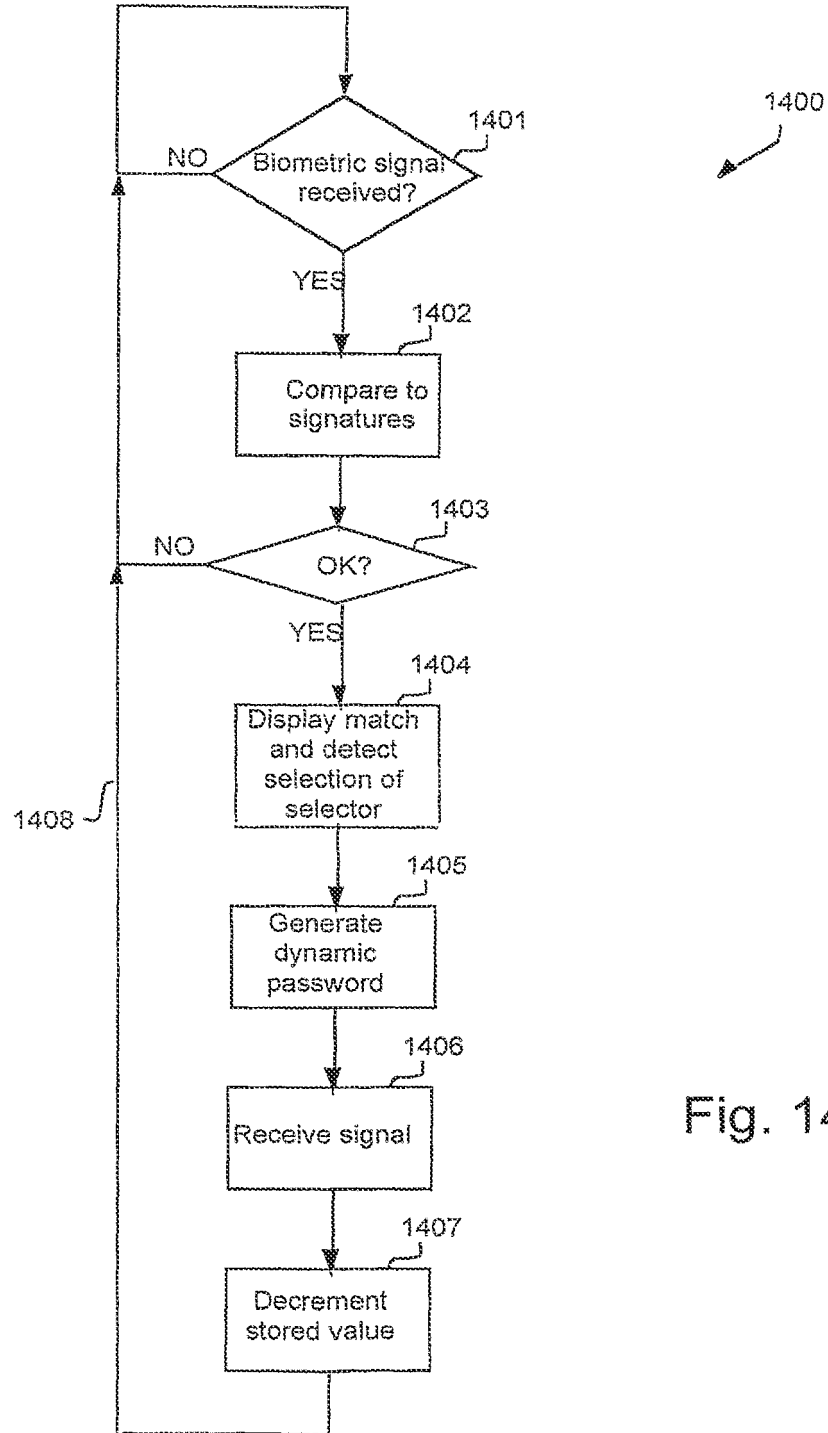


Fig. 14

TRANSMITTER FOR TRANSMITTING A SECURE ACCESS SIGNAL

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 17/167,996, filed Feb. 4, 2021, which is a continuation of U.S. patent application Ser. No. 16/717,270, filed Dec. 17, 2019, which issued as U.S. Pat. No. 10,949,849 on Mar. 16, 2021, which is a continuation application of U.S. patent application Ser. No. 15/213,661, filed Jul. 19, 2016, now U.S. Pat. No. 10,685,353, issued Jun. 16, 2020, which is a continuation application of U.S. patent application Ser. No. 14/308,091, filed Jun. 18, 2014, abandoned, which is a continuation application of U.S. patent application Ser. No. 12/738,663, filed Apr. 22, 2010, abandoned, which is a national stage entry of PCT/AU2008/001490, filed Oct. 8, 2008, which claims priority to AU2007905760, filed Oct. 22, 2007, and also claims priority to AU2008900672, filed Feb. 13, 2008, the disclosure of each of which is hereby incorporated herein in its entirety by this reference.

TECHNICAL FIELD

The present disclosure relates to secure access systems and, in particular, to systems for remote entry access.

BACKGROUND

FIG. 1 shows a conventional arrangement 400 for providing secure access. A user 401 makes a request 402, as depicted by an arrow, directed to a code entry module 403. The code entry module 403 is typically mounted on the external jamb of a secure door. The request 402 is typically a secure code of some type that is compatible with the code entry module 403. Thus, for example, the request 402 can be a card number stored within a conventional proximity card used to direct the request 402 to a code entry module 403, e.g., a card reader. Alternatively, the request 402 can be a sequence of secret numbers directed to a code entry module 403, i.e., a keypad. The request 402 can also be a biometric signal from the user 401 directed to a code entry module 403, e.g., a corresponding biometric sensor. One example of a biometric signal is a fingerprint. Other physical attributes that can be used to provide biometric signals include voice, retinal or iris pattern, face pattern, palm configuration and so on.

The code entry module 403 conveys the request 402 by sending a corresponding signal 404, as depicted by an arrow, to a controller 405, which is typically situated in a remote or inaccessible place. The controller 405 authenticates the security information provided by the user 401 by interrogating a database 407 with signal 406, as depicted by an arrow. If the user 401 is authenticated, and has the appropriate access privileges, then the controller 405 sends an access signal 408, as depicted by an arrow, to a device 409 in order to provide the desired access. The device 409 can, for example, be the locking mechanism of a secure door, or can be an electronic lock on a personal computer (PC) that the user 401 desires to access.

Current systems as depicted in FIG. 1 utilize a communication protocol called "Wiegand" for communication between the code entry module 403 and the controller 405. The Wiegand protocol is a simple one-way data protocol that can be modified by increasing or decreasing the bit count to

ensure uniqueness of the protocol among different security companies. The Wiegand protocol does not secure the information being sent between the code entry module 403 and the controller 405.

More advanced protocols such as RS 485 have been used in order to overcome the vulnerability of the Wiegand protocol over long distance routes. RS 485 is a duplex protocol offering encryption capabilities at both the transmitting and receiving ends, i.e., the code entry module 403 and the controller 405, respectively, in the present case. The length of the path of the signal 404 nonetheless provides an attack point for the unauthorized person.

Proximity cards have become a popular means for emitting the request 402, since proximity cards are cheap, easy to use and convenient to carry for the user 401. Typically, proximity cards comprise an inductive circuit including an integrated circuit (IC), a capacitor, and a coil, which are connected in series within the card. When a proximity card 410 is placed within range of the code entry module 403 (or "card reader"), the code entry module 403 presents a field that excites the coil and charges the capacitor, which in turn energizes the IC on the proximity card 410. The IC then transmits a card number stored within the IC, via the coil as transmit antenna, to the code entry module 403. The field emitted by the code entry module 403 for older proximity cards is typically around 125 kHz. The field emitted by the code entry module 403 for newer proximity cards is typically around 13.56 MHz. These newer proximity cards are typically in the form of contactless RFID cards, which are also known as "contactless smartcards." Proximity cards have a communication range of 0-80 mm in most instances, allowing the user to place the proximity card 410 within 80 mm of the code entry module 403 in order for the card to be read by the code entry module 403. The term "communication range" refers, in the described example, to the distance to within which the proximity module 126 and the code entry module 130 must be brought in order for their respective transmit/receive antennas to be able to achieve satisfactory communications.

Conventional proximity cards (e.g., 410) used for emitting the request 402 may be lost by the user 401, and the lost proximity card 410 may be used by an unauthorized person to gain the desired access. In fact, there has been a high incidence of such fraudulent activity with conventional proximity cards where unauthorized persons steal the cards. As a result many users have looked to upgrade their proximity card secure access systems with other more secure systems. However, the cost of such up-grades is high due to the necessity to re-wire buildings and facilities to implement the upgrades.

BRIEF SUMMARY

It is an object of the present disclosure to substantially overcome, or at least ameliorate, one or more disadvantages of existing arrangements.

According to a first aspect of the present disclosure, there is provided a transmitter for transmitting a secure access signal to a system for providing secure access to a controlled item, the access being dependent on information contained in the secure access signal, the transmitter comprising:

- a biometric sensor for receiving a biometric signal;
- a processor for matching the biometric signal against members of a database of biometric signatures; and
- enabling means for enabling an inductive circuit, based on the matching of the biometric signal, to transmit the secure access signal conveying the information to the

3

system upon the inductive circuit being placed within range of a radio frequency field emitted by the system.

According to another aspect of the present disclosure, there is provided a method of transmitting a secure access signal to a system for providing secure access to a controlled item, the access being dependent on information contained in the secure access signal, the method comprising:

- receiving a biometric signal;
- matching the biometric signal against members of a database of biometric signatures; and
- enabling an inductive circuit, based on the matching of the biometric signal, to transmit the secure access signal conveying the information to the system upon the inductive circuit being placed within range of a radio frequency field emitted by the system.

According to still another aspect of the present disclosure, there is provided a computer program product having a computer readable medium having a computer program recorded therein for transmitting a secure access signal to a system for providing secure access to a controlled item, the access being dependent on information contained in the secure access signal, the program comprising:

- code for receiving a biometric signal;
- code for matching the biometric signal against members of a database of biometric signatures; and
- code for enabling an inductive circuit, based on the matching of the biometric signal, to transmit the secure access signal conveying the information to the system upon the inductive circuit being placed within range of a radio frequency field emitted by the system.

According to still another aspect of the present disclosure, there is provided a system for providing secure access to a controlled item, the system comprising:

- a database of biometric signatures;
- a transmitter sub-system comprising:
 - a biometric sensor for receiving a biometric signal;
 - means for matching the biometric signal against members of the database of biometric signatures; and
 - means for enabling an inductive circuit, based on the matching of the biometric signal, to transmit a secure access signal conveying information upon the inductive circuit being placed within range of a radio frequency field; and
- a receiver sub-system comprising:
 - means for emitting the radio frequency field;
 - means for receiving the transmitted secure access signal upon the radio frequency field being emitted; and
 - means for providing conditional access to the controlled item dependent upon the information.

According to still another aspect of the present disclosure, there is provided a transmitter sub-system for operating in a system for providing secure access to a controlled item, the system comprising a database of biometric signatures, a receiver sub-system comprising means for emitting a radio frequency field, means for receiving a secure access signal transmitted by the transmitter sub-system, and means for providing conditional access to the controlled item dependent upon information conveyed in the secure access signal; wherein the transmitter sub-system comprises:

- a biometric sensor for receiving a biometric signal;
- means for matching the biometric signal against members of the database of biometric signatures; and
- means for enabling an inductive circuit, based on the matching of the biometric signal, to transmit a secure access signal conveying the information upon the inductive circuit being placed within range of the radio frequency field.

4

According to still another aspect of the present disclosure, there is provided a receiver sub-system for operating in a system for providing secure access to a controlled item, the system comprising a database of biometric signatures, a transmitter sub-system comprising a biometric sensor for receiving a biometric signal, means for matching the biometric signal against members of the database of biometric signatures, and means for enabling an inductive circuit, based on the matching of the biometric signal, to transmit a secure access signal conveying information; wherein the receiver sub-system comprises:

- means for emitting a radio frequency field;
- means for receiving the transmitted secure access signal from the transmitter sub-system upon the inductive circuit being placed within range of a radio frequency field; and
- means for providing conditional access to the controlled item dependent upon the information.

According to still another aspect of the present disclosure, there is provided a system for providing secure access to one of a plurality of controlled items, the system comprising:

- a database of biometric signatures;
- a transmitter sub-system comprising:
 - a biometric sensor for receiving a biometric signal;
 - means for determining if the received biometric signal matches a member of the database of biometric signatures;
- a plurality of proximity modules associated with the plurality of controlled items;
- means for selecting one of the plurality of proximity modules; and
- means for enabling, if the received biometric signal matches a member of the database of biometric signatures, the selected proximity module, which can consequently transmit a secure access signal conveying information stored in the selected proximity module upon the proximity module being placed within range of a radio-frequency field adapted to activate the selected proximity module; and
- a receiver sub-system comprising:
 - means for emitting the radio frequency field adapted to activate the selected proximity module;
 - means for receiving the transmitted secure access signal upon the radio frequency field being emitted; and
 - means for providing conditional access to the selected controlled item dependent upon the information.

According to still another aspect of the present disclosure, there is provided a transmitter for transmitting a secure access signal to a system for providing secure access to one of a plurality of controlled items, the access being dependent on information contained in the secure access signal, the transmitter comprising:

- a biometric sensor for receiving a biometric signal;
- means for determining if the received biometric signal matches a member of a database of biometric signatures;
- a plurality of proximity modules associated with the plurality of controlled items;
- means for selecting one of the plurality of proximity modules; and
- means for enabling, if the received biometric signal matches a member of the database of biometric signatures, the selected proximity module, which can consequently transmit a secure access signal conveying information stored in the selected proximity module upon the proximity module being placed within range

5

of a radio-frequency field adapted to activate the selected proximity module.

According to still another aspect of the present disclosure, there is provided a receiver sub-system in a system for providing secure access to one of a plurality of controlled items, the system comprising a database of biometric signatures, a transmitter sub-system comprising a biometric sensor for receiving a biometric signal, means for determining if the received biometric signal matches a member of the database of biometric signatures, a plurality of proximity modules associated with the plurality of controlled items, means for selecting one of the plurality of proximity modules, and means for enabling, if the received biometric signal matches a member of the database of biometric signatures, the selected proximity module, which can consequently transmit a secure access signal conveying information stored in the selected proximity module upon the proximity module being placed within range of a radio-frequency field adapted to activate the selected proximity module; the receiver sub-system comprising:

means for emitting the radio frequency field adapted to activate the selected proximity module;

means for receiving the transmitted secure access signal upon the radio frequency field being emitted; and

means for providing conditional access to the selected controlled item dependent upon the information.

According to still another aspect of the present disclosure, there is provided a system for performing a secure transaction, the system comprising:

a database of one or more biometric signatures;

a first subsystem comprising:

a biometric sensor for receiving a biometric signal;

means for matching the biometric signal against members of the database of biometric signatures to thereby determine an authentication signal; and

means for generating a first password dependent upon the authentication signal, the password being generated according to an encryption process based on a dynamic input value, the first password comprising an encrypted value representing funds available; and

a second sub-system comprising;

means for receiving the first password;

means for determining the funds available based on the received password; and

means for performing the transaction based on the available funds.

According to still another aspect of the present disclosure, there is provided a first sub-system for operating in a system for performing a secure transaction, the system comprising a database of biometric signatures, a second sub-system comprising means for receiving a password, and means for performing the secure transaction based on available funds dependent upon the password, the first subsystem comprising:

a biometric sensor for receiving a biometric signal;

means for matching the biometric signal against members of the database of biometric signatures to thereby determine an authentication signal; and

means for generating the password dependent upon the authentication signal, wherein the password is generated according to an encryption process based on a dynamic input value, the first password comprising an encrypted value representing the funds available.

According to still another aspect of the present disclosure, there is provided a system for performing a secure transaction over a network using a card, the system comprising:

a database of one or more biometric signatures;

6

a first subsystem comprising:

a biometric sensor for receiving a biometric signal;

means for matching the biometric signal against members of the database of biometric signatures to thereby determine an authentication signal; and

means for generating a password dependent upon the authentication signal, the password being generated according to an encryption process based on a dynamic input value, the first password comprising an encrypted value representing the magnetic stripe card; and

a second sub-system comprising;

means for reading the card;

means for receiving the password;

means for authenticating the received password based on the card number encrypted within password; and

means for performing the transaction based on the authentication.

According to still another aspect of the present disclosure, there is provided a method of transmitting a secure access signal to a system for providing secure access to one of a plurality of controlled items, the access being dependent on information contained in the secure access signal, the method comprising the steps of:

receiving a biometric signal;

matching the biometric signal to a member of a database of biometric signatures;

selecting one of a plurality of proximity modules, the selected proximity module being associated with at least one of the plurality of controlled items; and

enabling the selected proximity module, if the received biometric signal matches a member of the database of biometric signatures, the enabled selected proximity module being configured for transmitting a secure access signal conveying information stored in to the selected proximity module upon the proximity module being placed within range of a radio-frequency field adapted to activate the selected proximity module.

According to still another aspect of the present disclosure, there is provided a method for performing a secure transaction over a network using a card, the method comprising:

matching a biometric signal against members of a database of biometric signatures to thereby determine an authentication signal; and

generating a password dependent upon the authentication signal, the password being generated according to an encryption process based on a dynamic input value, the password comprising an encrypted number representing the card;

reading the card to determine the card number from the card;

authenticating a received password based on the card number, encrypted within password; and

performing the transaction based on the authentication.

According to still another aspect of the present disclosure, there is provided a computer program product having a computer readable medium having a computer program recorded therein for transmitting a secure access signal to a system for providing secure access to a controlled item, the access being dependent on information contained in the secure access signal, the program comprising:

code for receiving a biometric signal;

code for matching the biometric signal to a member of a database of biometric signatures;

code for selecting one of a plurality of proximity modules, the selected proximity module being associated with at least one of the plurality of controlled items; and

code for enabling the selected proximity module, if the received biometric signal matches a member of the database of biometric signatures, the enabled selected proximity module being configured for transmitting a secure access signal conveying information stored in the selected proximity module upon the proximity module being placed within range of a radio-frequency field adapted to activate the selected proximity module.

According to still another aspect of the present disclosure, there is provided a computer program product having a computer readable medium having a computer program recorded therein for performing a secure transaction over a network using a card, the program comprising:

- code for matching a biometric signal against members of a database of biometric signatures to thereby determine an authentication signal; and
- code for generating a password dependent upon the authentication signal, the password being generated according to an encryption process based on a dynamic input value, the password comprising an encrypted number representing the card;
- code for reading the card to determine the card number from the card;
- code authenticating a received password based on the card number encrypted within password; and
- code for performing the transaction based on the authentication.

Other aspects of the present disclosure are also disclosed.

BRIEF DESCRIPTION OF THE DRAWINGS

Some aspects of the prior art and one or more embodiments of the present disclosure are described with reference to the drawings, in which:

FIG. 1 shows a conventional arrangement for providing secure access;

FIG. 2 is a functional block diagram of a system for providing secure access according to an exemplary embodiment of the present disclosure;

FIG. 3 shows an example of a method of operation of a transmitter sub-system of the system of FIG. 2;

FIG. 4 shows an example of a method of operation of a receiver sub-system of the system of FIG. 2;

FIG. 5A shows an example of a method of operation of the transmitter sub-system of FIG. 2 where the IC is a smart card chip;

FIG. 5B shows an example of a method of operation of the receiver sub-system of FIG. 2 where the IC is a smart card chip;

FIG. 6 is a schematic block diagram of the system in FIG. 2;

FIGS. 7A and 7B show an alternate arrangement for enabling the proximity module in FIG. 2;

FIG. 8 shows how the secure access system of FIG. 2 can support multiple selectable proximity modules;

FIG. 9 shows an example of a method of operation of the arrangement of FIG. 8;

FIG. 10 shows an example of a method of making an online payment using the arrangement of FIG. 8;

FIG. 11 is a functional block diagram of a general purpose computer system upon which the method of FIG. 10 may be implemented;

FIG. 12 shows an example of a method of debiting an amount of funds from an account stored within the transmitter sub-system of FIGS. 2 and 8;

FIG. 13 shows how the secure access system of FIG. 2 can support one or more conventional proximity modules according to another embodiment; and

FIG. 14 shows an example of a method of performing a secure transaction using the arrangement of FIG. 13.

DETAILED DESCRIPTION

It is to be noted that the discussions contained in the “Background” section relating to prior art arrangements relate to discussions of documents or devices that form public knowledge through their respective publication and/or use. Such should not be interpreted as a representation by the present inventor(s) or patent applicant that such documents or devices in any way form part of the common general knowledge in the art.

Where reference is made in any one or more of the accompanying drawings to steps and/or features that have the same reference numerals, those steps and/or features have for the purposes of this description the same function(s) or operation(s), unless the contrary intention appears.

FIG. 2 is a functional block diagram of a system 100 for providing secure access according to the exemplary embodiment. A user 101 makes a request 102, as depicted by an arrow, to a biometric module 103. The biometric module 103 includes a biometric sensor 121 and the request 102 takes the form of a biometric signal that corresponds to the nature of the sensor 121 in the module 103. In the embodiments described herein, the biometric sensor 121 in the module 103 is a fingerprint sensor and the request 102 typically takes the form of a thumb press on a sensor panel (not shown) on the module 103. Alternatively, the biometric sensor 121 may be responsive to one or more of voice, retinal pattern, iris pattern, face pattern and palm configuration.

The module 103 interrogates a user ID database 105 as communication 104, depicted by an arrow. Thus, for example, if the request 102 is the thumb press on the biometric sensor panel 121 then the user database 105 contains one or more members in the form of biometric signatures for authorized users against which the request 102 can be authenticated. If the identity of the user 101 is authenticated successfully, then the biometric module 103 sends a signal 106 to a controller 107. Upon receiving the signal 106, the controller 107 sends a signal 112, as depicted by an arrow, to a switch module 113 comprising a “normally open” switch 127. Any suitable mechanical or electronic (e.g., semiconductor) switch may be used to implement the switch 127.

As seen in FIG. 2, the switch module 113 is connected to a proximity module 126. The proximity module 126 comprises an inductive circuit formed from an IC 128, a coil 129 and a capacitor 131, which are connected in series. The IC 128 has information in the form of a unique card number stored within a memory of the IC 128. The switch 127 of the switch module 113 is connected in series with the IC 128, the coil 129 and the capacitor 131 of the proximity module 126. Accordingly, the proximity module 126 is similar to that used in conventional proximity cards such as those provided by financial institutions such as VISA®, MASTERCARD®, AMERICAN EXPRESS® and so on. However, the switch module 113 is configured to close and open the circuit formed by the IC 128, the coil 129 and the capacitor 131, thereby enabling and disabling the proximity module 126, respectively.

Upon receiving the signal 112 from the controller 107, the switch module 113 closes the normally open switch 127 for a predetermined period of time (e.g., four to five seconds).

Within this period the inductive circuit in the proximity card module **126** is enabled and may be placed by the user **101** within range of a radio frequency field being emitted by a code entry module **130**. The field emitted by the code entry module **130** excites the coil **129** and charges the capacitor **131**, which in turn energizes the IC **128** and thus activates the proximity module **126**. The IC **128** then transmits a secure access signal **132**, as depicted by an arrow, via the coil as transmit antenna, to the code entry module **130**. Accordingly, the secure access signal **132** is transmitted via the inductive circuit. The secure access signal **132** is configured for conveying information including the card number stored within the memory of the IC **128**.

The switch **127** is preferably implemented in the form of a flip/flop arrangement where upon receiving the signal **112** the switch **127** will close but will automatically return to the normally open position at the end of the predetermined period. Accordingly, if the proximity card module **126** is not placed within the range of the code entry module **130** within the predetermined period, then the field emitted by the code entry module **130** will not charge the capacitor **131** as the switch **127** has opened the circuit formed by the IC **128**, coil **129** and capacitor **131**. In this instance, the user **101** again makes the request **102** in order to enable the proximity module **126**.

Upon receiving the secure access signal **132** including the card number from the proximity card module **126**, the code entry module **130** sends a signal **108**, as depicted by an arrow, including the card number to a controller **109**. The controller **109** tests the card number received from the code entry module **130** against a database **115** of card numbers by sending test **114**, this test **114** being depicted by an arrow. If the incoming card number received from the code entry module **130** is found to be legitimate, then the controller **109** sends a command signal **110**, as depicted by an arrow, to a controlled item **111**. The controlled item **111** can be a door locking mechanism on a secure door, or an electronic lock (or key circuit) on a personal computer (PC) that is to be accessed by the user **101**. Accordingly, access to the controlled item **111** is dependent on the information (e.g., the card number) contained in the secure access signal **132**. The system **100** provides conditional access to the controlled item **111** dependent upon the information contained in the secure access signal **132**.

It is noted that the controller **109** contains a receiver **118** that receives the signal **108** including the card number and converts the signal **108** into a form **120**, as depicted by an arrow, which the controller **109** can use.

The biometric module **103** also incorporates at least one mechanism for providing feedback to the user **101**. This mechanism can, for example, take the form of one or more light emitting diode (LED) indicators **122**, which can provide visual feedback **123**, depicted by an arrow to the user **101**. Alternately, or in addition, the mechanism can take the form of an audio signal provided by an audio transducer **124** providing audio feedback **125**. Similarly, the code entry module **130** may also incorporate one or more mechanisms for providing feedback to the user **101**.

The transmitter sub-system (or transmitter) **116** in FIG. 2 falling to the left hand side, as depicted by an arrow, of a dashed line **119** may be implemented in a number of different forms. The transmitter sub-system **116** (or transmitter), including the biometric module **103**, the switch module **113**, the user ID database **105**, the controller **107** and the proximity module **126**, may, for example, be incorporated within a remote fob (which is a small portable device carried by the user **101**) or even a mobile (cell) telephone.

The biometric module **103** may be powered by an internal battery of the fob or telephone.

Similar to the transmitter sub-system **116**, the code entry module **130**, the controller **109**, database **115** and the controlled item **111** form a receiver sub-system **117** as seen in FIG. 2.

The code entry module **130** may be mounted in a protected enclosure on the outside jamb of a secured door. In this instance, the channel used by the signal **108** typically uses a wired medium. However, the code entry module **130** may communicate with the controller **109** via a wireless communication channel used by the signal **108**.

The controller **109**, database **115** and controlled item **111** are typically located in an inaccessible area such as a hidden roof space or alternately in a suitable protected area such as an armored cupboard. In the case that a wireless communication channel is used by the signal **108**, the location of the controller **109** is of course consistent with reliable reception of the wireless signal **108**.

In the case that the code entry module **130** communicates with the controller **109** via a wireless communication channel, the signal **108** may be based upon rolling code. However, it is noted that this is merely one arrangement, and other secure codes can equally be used. Thus, for example, either of the BLUETOOTH™ protocols, or the WI-FI™ protocols may be used.

Rolling codes provide a substantially non-replayable, non-repeatable and encrypted radio frequency data communications scheme for secure messaging. These codes use inherently secure protocols and serial number ciphering techniques, which may be used to hide clear text values required for authentication.

Rolling codes may use a different code variant each time the transmission of the signal **108** occurs. This is achieved by encrypting the data from the code entry module **130** with a mathematical algorithm, and ensuring that successive transmissions of the signal **108** are modified using a code and/or a look-up table known to both the code entry module **130** and the receiver sub-system **117**. Using this approach, successive transmissions are modified, resulting in a non-repeatable data transfer, even if the information from the code entry module **130** remains the same. The modification of the code in the signal **108** for each transmission significantly reduces the likelihood that an intruder can access the information and replay the information to thereby gain entry at some later time.

The biometric signature user ID database **105** is shown in FIG. 2 to be part of the transmitter sub-system **116**. The sub-system **116** may comprise a memory **1006** (see FIG. 6) containing the database **105** of biometric signatures. As described above, the transmitter sub-system **116** including the database **105** may be implemented as a remote fob, where the fob incorporates the biometric (e.g., fingerprint) authentication arrangement. However, in an alternate arrangement, the biometric signature user ID database **105** can be located in the receiver sub-system **117** together with the controller **109**, in which case the communication **104** between the biometric module **103** and the signature user ID database **105** can also be performed over a secure wireless communication channel. In the event that the secure access system **100** is being applied to providing secure access to a PC, then the secured PC can store the biometric signature of the authorized user in internal memory, and the PC can be integrated into the receiver sub-system **117** of FIG. 1.

The combination of the biometric verification and proximity module **126** in a remote fob provides a particularly significant advantage over current proximity card systems. If

11

the remote fob is lost by the user **101**, the lost remote fob may not be used by an unauthorized person to gain the desired access. Further, the security of conventional proximity card systems may be improved without the need to upgrade existing infrastructure.

FIG. 3 shows the method **200** of operation of the transmitter sub-system **116** of FIG. 2. The method **200** commences with a testing step **201** in which the biometric sensor **121** in the code entry module **130** checks whether a biometric signal **102** is being received. If this is not the case, then the method **200** is directed in accordance with a NO arrow back to the step **201** in a loop. If, on the other hand, the biometric signal **102** has been received, then the method **200** is directed in accordance with a YES arrow to a step **202**. The step **202** compares the received biometric signal **102** with information in the biometric signature user ID database **105** in order to ensure that the received biometric signal **102** is that of the rightful user **101** of the transmitter sub-system **116**.

A subsequent testing step **203** checks whether the comparison in the step **202** yields the desired authentication. If the biometric signature matching is authenticated, then the method **200** is directed in accordance with a YES arrow to a step **204**. In the step **204** the controller **107** sends the signal **112** to the switch module **113** to close the normally open switch **127** to allow the coil **129** to be excited when the proximity card module **126** is placed within range of the code entry module **130**. Then at the next step **205**, upon the proximity card module **126** being placed within the field of the code entry module **130**, the coil **129** is excited and charges the capacitor **131**, which in turn energizes the IC **128**. The IC **128** then transmits secure access signal **132**, i.e., the card number stored within the IC **128**, as depicted by an arrow, via the coil, to the code entry module **130**. The method **200** is then directed in accordance with an arrow **206** back to the step **201**.

Returning to the testing step **203**, if the signature comparison indicates that the biometric signal **102** is not authentic, and has thus not been received from the proper user, then the method **200** is directed in accordance with a NO arrow back to the step **201**. In an alternate arrangement, the NO arrow from the step **203** could lead to a disabling step that would disable further operation of the transmitter sub-system **116**, either immediately upon receipt of the incorrect biometric signal **102**, or after a number of attempts to provide the correct biometric signal **102**.

FIG. 4 shows the method of operation of the receiver sub-system **117** of FIG. 2. The method **300** commences with a testing step **301** that continuously checks whether the signal **108** including the card number has been received from code entry module **130**. The step **301** is performed by the controller **109**. As long as the signal **108** is not received the method **300** is directed in accordance with a NO arrow in a looping manner back to the step **301**. When the signal **108** is received, the method **300** is directed from the step **301** by means of a YES arrow to a step **302**. In the step **302**, the controller **109** compares the card number received by means of the signal **108** with one or more card numbers stored in the database **115**. A subsequent testing step **303** is performed by the controller **109**. In the step **303** if the card number received on the signal **108** is successfully matched against a card number stored in the database **115** then the method **300** is directed in accordance with a YES arrow to a step **304**.

In the step **304** the controller **109** sends the control signal **110** to the controlled item **111** (for example, opening the secured door). The method **300** is then directed from the step **304** as depicted by an arrow **305** back to the step **301**.

12

Returning to the testing step **303** if the card number received on the signal **108** is not successfully matched against card number stored in the database **115** by the controller **109** then the method **300** is directed from the step **303** in accordance with a NO arrow back to the step **301**. As was described in regard to FIG. 3, in an alternate arrangement, the method **300** could be directed, if the card number match is negative, from the step **303** to a disabling step that would disable the receiver sub-system **117** if the incorrect card number were received once or a number of times.

In the exemplary embodiment described above, the IC **128** merely stores information in the form of a unique card number. In an alternative embodiment, the IC **128** may be a smart card chip that may be used to store one or more other values as well as the unique card number. Such an embodiment provides particular advantages where the transmitter sub-system **116** is being used to pay for a service. For example, the IC **128** may further comprise a memory (not shown) containing a "stored value" representing an amount of money where the transmitter sub-system **116** is being used for paying the fare on a bus or other form of public transport.

FIG. 5A shows a method **500** of operation of the transmitter sub-system **116** of FIG. 2 where the IC **128** is a smart card chip containing a stored value representing an amount of money, in accordance with the alternative embodiment. The method **500** commences with a testing step **501** in which the biometric sensor **121** in the code entry module **130** checks whether a biometric signal **102** is being received. If this is not the case, then the method **500** is directed in accordance with a NO arrow back to the step **501** in a loop. If, on the other hand, the biometric signal **102** has been received, then the method **500** is directed in accordance with a YES arrow to a step **502**. The step **502** compares the received biometric signal **102** with information in the biometric signature user ID database **105** in order to ensure that the received biometric signal **102** is that of the rightful user **101** of the transmitter sub-system **116**.

A subsequent testing step **503** checks whether the comparison in the step **502** yields the desired authentication. If the biometric signature matching is authenticated, then the method **500** is directed in accordance with a YES arrow to a step **504**. In the subsequent step **504** the controller **107** sends the signal **112** to the switch module **113** to close the normally open switch **127** to allow the coil **129** to be excited when the proximity module **126** is placed within range of the code entry module **130**. Then at the next step **505**, upon the proximity module **126** being placed within the field of the code entry module **130**, the coil **129** is excited and charges the capacitor **131**, which in turn energizes the IC **128**. The IC **128** then transmits secure access signal **132**, i.e., the card number stored within the IC **128**, as depicted by an arrow, via the coil, to the code entry module **130**.

At the next step **506**, the proximity module **126** receives a signal **133**, as depicted by an arrow, from the code entry module **130**. In the described arrangement, the signal **133** is received via the coil **129** acting as a receive antenna. Then at the next step **507**, the IC **128** decrements the stored value by a predetermined amount. This predetermined amount may represent the fare for a trip on a bus, for example. In another alternative embodiment, the signal **133** received from the code entry module **130** may include a value indicating an amount that needs to be decremented from the stored value in step **507**. In this instance, the IC **128** decrements the stored value by the amount represented by the value received from the code entry module **130**. Accordingly, the stored value is decremented by an amount (i.e.,

13

either predetermined or variable) depending on the information (such as the card number) contained in the secure access signal **132** and the proximity module **126** never has to leave the user's hand. Following step **507**, the method **500** is then directed in accordance with an arrow **508** back to the step **501**.

FIG. **5B** shows a method **510** of operation of the receiver sub-system **117** of FIG. **2** where the IC **128** is the smart card chip containing the stored value of FIG. **5A**. The method **510** commences with a testing step **511** that continuously checks whether the signal **108** including the card number has been received from code entry module **130**. The step **511** is performed by the controller **109**. As long as the signal **108** is not received the process **510** is directed in accordance with a NO arrow in a looping manner back to the step **511**. When the signal **108** is received, the method **510** is directed from the step **511** by means of a YES arrow to a step **512**. In the step **512**, the controller **109** compares the card number received by means of the signal **108** with the card numbers stored in the database **115**. A subsequent testing step **513** is performed by the controller **109**. In the step **513** if the card number received on the signal **108** is successfully matched against a card number stored in the database **115** then the method **510** is directed in accordance with a YES arrow to a step **514**. In the step **514**, the controller **109** sends a signal **134**, as represented by an arrow in FIG. **2**, to the code entry module **130** indicating that the card number was successfully matched.

In the alternative embodiment of FIG. **5A**, the amount by which the stored value should be decremented (i.e., the amount of the fare) is predetermined. However, in one arrangement, the amount by which the stored value should be decremented may be variable (e.g., where the fare is variable). In this instance, the signal **134** may include a value representing the value of the fare.

At step **515**, if the code entry module **130** determines that the stored value is more than the fare, then the method **510** is directed by a YES arrow to a step **516**. The code entry module **130** may read a particular memory address in the IC **128** to determine if the stored value is more than the fare.

At step **516**, the code entry module **130** sends the signal **133** to the proximity module **126** to indicate that the stored value should be decremented by the predetermined amount. As described above, the signal **133** may include a value indicating an amount that needs to be decremented from the stored value. At step **516**, the code entry module **130** may also send a further signal to the controller **109**, which in turn sends a signal **110** to the controlled item **111**. In this instance, the controlled item may merely produce an audible tone indicating that the fare has been paid. Alternatively, the controlled item **111** may open a gate or enable a turnstile. The method **510** is then directed from the step **516** as depicted by an arrow **517** back to the step **511**.

Returning to the testing step **513** if the card number received on the signal **108** is not successfully matched against card number stored in the database **115** by the controller **109** then the method **510** is directed from the step **513** in accordance with a NO arrow back to the step **511**. In this instance, the controller **109** may send a signal **110** to the controlled item **111**, which then sounds an audible alert to indicate that the fare has not been paid.

Returning to the testing step **515**, if the code entry module **130** determines that the stored value is less than the fare, then the process **510** is directed from the step **515** in accordance with a NO arrow back to the step **511**. Again, in this instance, the controller **109** may send a signal **110** to the

14

controlled item **111**, which then sounds an audible alert to indicate that the fare has not been paid.

In the embodiment of FIGS. **5A** and **5B**, the code entry module **130** may include a liquid crystal display (LCD) screen (not shown) for providing feedback to the user **101**. In this instance, at step **515**, the code entry module **130** may display the amount of the fare as well as the amount of the stored value representing the remaining amount of money on the proximity module **126**.

The transmitter sub-system **116** as described with reference to FIGS. **5A** and **5B** may also be configured to enable value to be added to the stored value. For example, a cash station similar to a train ticket vending machine may be configured with a card reader similar to the code entry module **130**. In this instance, upon entering an amount of money into the vending machine (e.g., via a note collector) and providing a biometric request to the biometric sensor **121**, the proximity module **126** may be placed within the field of the card reader module **130** of the vending machine. The card reader module **130** may then send a signal to proximity module **126** indicating the value of the money entered into the vending machine and the corresponding amount by which the stored value is to be incremented.

The transmitter sub-system **116**, including the switch module **113** and the proximity module **126**, may also include an LCD screen (not shown) for providing feedback to the user **101**. The LCD screen may be used for displaying information, such as the stored value, stored on the transmitter sub-system **116**. In this instance, at step **507** of the method **500**, the LCD of the transmitter sub-system **116** may display the amount of the fare as well as the amount of the stored value representing the remaining amount of money stored in the IC of the proximity module **126**. In this instance, the LCD and the IC **128** included in the transmitter sub-system **116** may be powered by a battery (e.g., a battery incorporated within the remote fob). In this instance, the user **101** may determine the amount of money remaining on the transmitter sub-system **116** by presenting a biometric request. After the biometric has been authenticated in the manner described above, the amount of the stored value may be displayed on the LCD.

The IC **128** may also be used to store personal details, health records, account balances, personal identification numbers (PIN) and/or other pertinent data. Again, after a biometric has been authenticated in the manner described above, the personal details, medical records, account balances and/or PIN may be displayed on the LCD.

The IC **128** may also be used to store audit trail information so that a record is kept of the date and time that the user **101** attempted to gain access to the controlled item **111**.

As will be described in detail below, the ICs such as the IC **128** may also be used to generate a one-time dynamic password for use in online banking applications or the like. If the identity of the user **101** is authenticated successfully upon the user presenting a particular biometric (e.g., an index finger), as described above, then the biometric module **103** sends the signal **106** to the controller **107**. The controller **107** may then access a key stored in a key database (not shown) and generate a one-time password using the key and the current time, which the controller **107** determines from a clock (not shown). The password may be displayed on the LCD. The password may be generated using the RSA encryption algorithm. However, any suitable encryption algorithm may be used (e.g., Data Encryption Standard (DES), Blowfish, International Data Encryption Algorithm (IDEA)). The user may then provide the generated password read from the LCD to an authentication server via a personal

15

computer and communications network (see FIG. 11) in order to make an online banking transaction, for example.

The transmitter sub-system 116 of any of the described embodiments may be used in automotive applications where the controlled item 111 is the central locking of a car. The controlled item 111 may also activate or deactivate an engine immobilizer.

The transmitter sub-system 116 of any of the embodiments described may also be used in resort areas, hotels, theme parks or the like. In this instance, the internal operators of the resort areas, hotels and theme parks may issue the transmitter sub-system 116 incorporated within a remote fob, for example, to the user 101. The user 101 may then operate the transmitter sub-system 116 within the confines of the resort, hotel or theme park to enter their room or to go on a ride, where the code entry module 130 is mounted on a door jamb or near a gate, respectively.

Any suitable and secure method may be used for populating the user ID database 105 with biometric signatures. Biometric signatures may be added to the user ID database 105 or deleted from the user ID database 105. For example, if a biometric signal has been received by the biometric module 103 and the user ID database 105 in FIG. 2 is empty, then the received biometric may be treated as an "administrator." This would be the case, for example, if the biometric module 103 is new and has never been used, or if the user 101 has erased all the information in the database 105. The administrator may have the ability to amend data stored, for example, in the database 105. Another type of user may be termed an "ordinary user" and may not have the capability to amend the data stored in the user ID database 105.

The first user of the biometric module 103, whether this is the user who purchases the module, or the user who programs the module 103 after all data has been erased from the database 105, may be automatically categorized as an administrator. This first administrator may direct the system 100 to either accept further administrators, or alternately to only accept further ordinary users.

FIG. 6 is a schematic block diagram of the system 100' in FIG. 2. The disclosed secure access methods are preferably practiced using a computer system arrangement 100', such as that shown in FIG. 6 wherein the processes of FIGS. 3-5B and FIGS. 9, 12 and 14 may be implemented as software, such as application program modules executing within the computer system 100'. In particular, the method steps for providing secure access are effected by instructions in the software that are carried out under direction of the respective processor modules 107 and 109 in the sub-systems 116 and 117. The instructions may be formed as one or more code modules, each for performing one or more particular tasks. The software may also be divided into two separate parts, in which a first part performs the provision of secure access methods and a second part manages a user interface between the first part and the user. The software may be stored in a computer readable medium, including the storage devices described below, for example. The software is loaded into the sub-systems 116 and 117 from the computer readable medium, and is then executed under direction of the respective processor modules 107 and 109. A computer readable medium having such software or computer program recorded on it is a computer program product. The use of the computer program product in the computer preferably effects an advantageous apparatus for provision of secure access.

The following description is directed primarily to the transmitter sub-system 116, however the description applies in general to the operation of the receiver sub-system 117.

16

The computer system 100' is formed, having regard to the transmitter sub-system 116, by the controller 107, input devices such as the biometric sensor 121, output devices including the LED indicators 122, the audio transducer 124 and the switch module 113.

The controller module 107 typically includes at least one processor unit 1005, and a memory unit 1006, for example, formed from semiconductor random access memory (RAM) and read only memory (ROM). The controller module 107 also includes a number of input/output (I/O) interfaces including an audio-video interface 1007 that couples to the LED display 122 and audio speaker 124, an I/O interface 1003 for the biometric sensor 121 and the switch module 113. The switch module 113 is connected to the proximity module 126.

The components 1005, 1007, 1003 and 1006 of the controller 107 typically communicate via an interconnected bus 1004 and in a manner that results in a conventional mode of operation of the controller 107 known to those in the relevant art.

Typically, the application program modules for the transmitter sub-system 116 are resident in the memory 1006 iROM, and are read and controlled in their execution by the processor 1005. Intermediate storage of the program and any data fetched from the biometric sensor 121 and a network, for example, may be accomplished using the RAM in the memory 1006. In some instances, the application program modules may be supplied to the user encoded into the ROM in the memory 1006. Still further, the software modules can also be loaded into the transmitter sub-system 116 from other computer readable media (e.g., over a communications network). The term "computer readable medium" as used herein refers to any storage or transmission medium that participates in providing instructions and/or data to the transmitter sub-system 116 for execution and/or processing. Examples of storage media include floppy disks, magnetic tape, CD-ROM, a hard disk drive, a ROM or integrated circuit, a magneto-optical disk, or a computer readable card such as a PCMCIA card and the like, whether or not such devices are internal or external of the transmitter sub-system 116. Examples of transmission media include radio or infrared transmission channels as well as a network connection to another computer or networked device, and the Internet or Intranets including e-mail transmissions and information recorded on Websites and the like.

FIGS. 7A and 7B show an alternate arrangement for enabling the proximity module in FIG. 2. FIG. 7A shows the proximity arrangement of FIG. 2, in which the control signal 112 from the controller 107 of the transmitter sub-system 116 is used to control the switch module 113. When the switch 127 is open, the series circuit comprising the IC 128, the coil 129 and the capacitor 131 is open, and thus the proximity module 126 is disabled and cannot operate when it is brought into the field emitted by the code entry module 130. When the switch 127 is closed, the series circuit comprising the IC 128, the coil 129 and the capacitor 131 is closed, and thus the proximity module 126 is enabled and can perform its designated functions when brought into the field emitted by the code entry module 130. In this arrangement, the control signal 112 can be a simple binary signal, in which, for example, one voltage level can cause the switch 127 to be in an open state, and another voltage level can cause the switch 127 to be in an open state.

FIG. 7B shows an alternate arrangement 702 in which a proximity module 704 has a series circuit comprising an IC 705, a coil 707 and a capacitor 706 that is permanently closed, and in this arrangement, a control signal 703 controls

the operation of the IC 705 directly. In this arrangement, the control signal can in one example comprise a secure encrypted communication session, using multiple layers of security if desired, between the controller 107 (see FIG. 2) and the IC 705. In another simpler arrangement, the control signal 703 can be a simple binary signal that merely enables or disables the operation of the IC 705. Upon receiving the signal 112 from the controller 107, the IC 705 remains enabled for a predetermined period of time (e.g., four to five seconds). Within this period the proximity module 704 is enabled and may be placed by the user 101 within range of a radio frequency field being emitted by a code entry module 130. Although the arrangement of FIG. 7B shows one series circuit for each IC 705, other arrangements may be used that share some of the components such as the coils and/or the capacitors.

The communication between the controller 107 and the IC 705 can be implemented using data and/or address bus communications, via a direct bus connection between the controller 107 and the IC 705. Alternatively, the communication between the controller 107 and the IC 705 can be implemented using a contactless communication interface comprising the series circuit of the IC 705, the coil 707 and the capacitor 706. The contactless communication interface between the controller 107 and the IC 705 is a software interface. Any suitable contactless communication interface may be used. In one example, the controller 107 may communicate with the IC 705 according to the Sliding Window Protocol (SWP).

FIG. 8 shows how the secure access system of FIG. 2 can, using the proximity module arrangement of FIG. 7B, support multiple selectable proximity modules (e.g., 806A and 806B). FIG. 8 shows the biometric module 103 of FIG. 2 together with the audio transducer 124, the LED indicators 122 and the biometric sensor 121. In this arrangement 800, however, the biometric module 103 also has a set of control selectors 801 designated selectors 1-4 in the present example for selecting one or more control functions. A greater or smaller number of selectors can be incorporated as desired. Furthermore, the module 103 has an LCD display 802.

According to this arrangement, once the identity of the user 101 is authenticated successfully, the user may select one of the set of the control selectors 801 such as the selector designated "1." In response to such a selection, the biometric module 103 sends a signal 803 to the controller 107. Upon receiving the signal 803, the controller 107 sends a control signal on a control line 807A to a corresponding proximity module 806A. Upon receiving the control signal from control line 807A from the controller 107, the proximity module 806A remains enabled for a predetermined period of time (e.g., four to five seconds). Within this period the proximity module 806A is enabled and may be placed by the user 101 within range of a radio frequency field being emitted by a code entry module 130. Again, the biometric module 103, the controller 107 and the plurality of the proximity modules (e.g., 806A, 806B) may, for example, be incorporated within a remote fob or mobile telephone, together with the switch module 113 and the user ID database 105. The arrangement 805 of FIG. 8 can be used to incorporate a number of different ICs (e.g., 705A, 705B—not shown) (being the service provider specific elements in the corresponding proximity modules) in a single transmitter sub-system 116, each IC and associated proximity module being associated with a different service provider (such as VISA®, MASTERCARD®, AMERICAN EXPRESS® and so on). This arrangement would enable the user 101, after biometric authentication, to select the appropriate service provider by

pressing the appropriate selector in the set of control selectors 801, and to then bring the corresponding proximity module 806A into the field emitted by the code entry module 130. In fact, all of the proximity modules incorporated into the transmitter sub-system 116 are being brought into the field emitted by the code entry module 130 however only the desired proximity module 806A is enabled by the signal 803.

The LCD display 802 can show the user 101 which service provider has been selected, thereby confirming to the user that the desired service provider has been selected. The LCD display 802 can be provided before the user places the proximity module (e.g., 806A) into the field emitted by the corresponding code entry module 130.

In a more general case, the various selectable proximity modules (e.g., 806A, 806B) can be associated with service providers from diverse fields, namely financial, security, automotive, individual identification and so on, and can have different interfaces with the respective code entry modules such as 130. Therefore, the ICs 705A, 705B configured within the proximity modules 806A, 806B may include a combination of ICs such as the known HID™ proximity IC, iCLASS IC, and MIFARE™ IC, each for a distinct application and using a different interface. The user 101 may select the desired application using the set of control selectors 801, and optionally can receive feedback on the selection via the LCD display 802.

Security and payment functionality may be combined using one or more iterations of authentication and selection, thus facilitating operation with existing infrastructure. For example, the proximity module 806A and corresponding IC 705A may contain a stored unique number for use in secure access and the proximity module 806B and corresponding IC 705B may contain a stored value for use in making cashless payments as described above.

The controller 107 may also be configured to generate a one-time dynamic "time-dependent" or "event-synchronous" password. Upon authentication of a user's biometric as described above with reference to FIG. 3, the controller 107 may access a key stored in a database (e.g., the database 115). The controller 107 may then generate a one-time time-dependent password using the key and the current time (as a dynamic input value), for example. The current time may be determined from a computer clock (not shown) configured within the arrangement 800 of FIG. 8. The password may be generated using the RSA encryption algorithm or any other suitable encryption algorithm (e.g., Data Encryption Standard (DES), Blowfish, International Data Encryption Algorithm (IDEA)).

Accordingly, a password may be generated using the current time as the input value to the encryption process. It is noted that this is merely one arrangement, and other input values such as a simple counter value or a random number may be used as with event-synchronous tokens and asynchronous challenge/response tokens. Further, other mathematical algorithms or codes can equally be used to generate the one-time password. For example, the password may be generated using a rolling code to generate a different code variant each time the password is generated. In this instance, successive passwords may be generated using a code and/or a look-up table known to both the code entry module 130 and receiver sub-system 117. Using this approach successive numbers are modified, resulting in a non-repeatable number.

The user 101 may make a payment (e.g., a VISA® payment) at a conventional (i.e., not using the proximity module) payment terminal or online by selecting the appropriate control selector 801 from the set, then pressing a suitable combination of the control selectors 801 as guided

by a display on the LCD display **802** and waiting for a one-time password to be generated and shown on the LCD display **802**. The password may then be manually entered into the keyboard of the payment terminal or personal computer. This approach supports applications including business-to-business on line payments through to standard contactless payments at existing payment terminals.

FIG. **9** shows a method **900** of operation of the arrangement **800** of FIG. **8** according to one example. In the example of FIG. **9**, the user **101** generates a dynamic password using the arrangement **800** of FIG. **8**. The dynamic password may then be used for making an online payment to a business website. In the present example, the online payment is being made using a VISA® account. The example provides a secure scenario as a reference to a typical transaction. However, variations of the steps of the methods described below including input from the user **101**, biometric reads, generation of dynamic passwords, display of current account balances, can be used to conduct various transactions.

The method **900** of FIG. **9** may be implemented as software, such as application program modules being controlled in their execution by the controller **107** and being resident in the memory **1006** of the controller **107**. The method **900** commences with a testing step **901** in which the biometric sensor **121** in the code entry module **130** checks whether a biometric signal **102** is being received. If this is not the case, then the method **900** is directed in accordance with a NO arrow back to the step **901** in a loop. If, on the other hand, the biometric signal **102** has been received, then the method **900** is directed in accordance with a YES arrow to a step **902**. The step **902** compares the received biometric signal **102** with information in the biometric user ID database **105** in order to ensure that the received biometric signal **102** is that of the rightful user **101**.

A subsequent testing step **903** checks whether the comparison in the step **902** yields the desired authentication. If the biometric signature matching is authenticated, then the method **900** is directed in accordance with a YES arrow to a step **904**. At step **904**, the controller **107** detects selection of one of the control selectors **801** of the set. In the present example, the control selector **801** "1" of the set is selected. In response to selection of the selector "1," at the next step **905**, the controller **107** displays the value, stored on one of the ICs, representing available funds. In the present example, the IC **705A** is a VISA® IC for making VISA® card payments and comprises the stored value. The value is displayed on the LCD display **802**. In the present example, the controller **107** displays \$156.56, which represents the balance of the user's VISA® account.

At the next step **906**, if within a predetermined period of time (e.g., 30 seconds) the controller **107** again detects selection of the same control selector **801** (i.e., selector "1") of the set, then the method **900** is directed in accordance with a YES arrow to a step **907**. Otherwise, the method **900** is directed in accordance with a NO arrow to the step **901**. At step **907**, the controller **107** generates a dynamic password (i.e., a first dynamic password), using the RSA encryption algorithm, as described above. The dynamic password is displayed on the LCD display **802**.

In the present example, the dynamic password generated at step **907** is "2 3 4 9 8 7 8 9." The dynamic password will be different each time it is generated. The dynamic password may be a time-dependent password where the current time is used as the input value to the encryption process. The available funds and the unique token serial number are also

preferably encrypted with the generated password. Alternatively, the dynamic password may be an event-synchronous password.

In accordance with the present example, the first dynamic password generated and displayed by the controller **107** at step **907** is entered into a computer module **1101** of a computer system **1100** as shown in FIG. **11**, in order to make the online payment to the business website. The online payment is made in accordance with a method **1000** of making an online payment, which will be described in detail below with reference to FIG. **10**. The method **1000** may be implemented using the computer system **1100**, wherein the process of FIG. **10** may be implemented as software, such as one or more application programs executable within the computer system **1100**. In particular, the steps of method **1000** may be effected by instructions in the software that are carried out within the computer system **1100**. The instructions may be formed as one or more code modules, each for performing one or more particular tasks. The software may also be divided into two separate parts, in which a first part and the corresponding code modules performs the method **1000** and a second part and the corresponding code modules manage a user interface between the first part and the user. The software may be stored in a computer readable medium, including the storage devices described below, for example. One or more portions of the software may be stored within the computer module **1101** and also on a remote server **1150**, as will be described below. The software is loaded into the computer system **1100** from the computer readable medium, and then executed by the computer system **1100**. A computer readable medium having such software or computer program recorded on it is a computer program product as described above. The use of the computer program product in the computer system **1100** preferably effects an advantageous apparatus for implementing the method **1000**.

As seen in FIG. **11**, the computer system **1100** is formed by a computer module **1101**, input devices such as a keyboard **1102** and a mouse pointer device **1103**, and output devices including a display device **1114** and loudspeakers **1117**. The output devices may also include a printer (not shown). An external Modulator-Demodulator (Modem) transceiver device **1116** may be used by the computer module **1101** for communicating to and from a communications network **1120** via a connection **1121**. The network **1120** may be a wide-area network (WAN), such as the Internet or a private WAN. Where the connection **1121** is a telephone line, the modem **1116** may be a traditional "dial-up" modem. Alternatively, where the connection **1121** is a high capacity (e.g., cable) connection, the modem **1116** may be a broadband modem. A wireless modem may also be used for wireless connection to the network **1120**.

In accordance with the present example, a server **1150** hosting a payments website (e.g., a utility website such as the phone company or bank website) is connected to the network **1120**.

The computer module **1101** typically includes at least one processor unit **1105**, and a memory unit **1106**, for example, formed from semiconductor random access memory (RAM) and read only memory (ROM). The computer module **1101** also includes a number of input/output (I/O) interfaces including an audio-video interface **1107** that couples to the video display **1114** and loudspeakers **1117**, an I/O interface **1113** for the keyboard **1102** and mouse **1103** and optionally a joystick (not illustrated), and an I/O interface **1108** for the external modem **1116** and printer **1115**. In some implementations, the modem **1116** may be incorporated within the computer module **1101**, for example, within the I/O interface

21

1108. The computer module **1101** also has a local network interface **1111** that, via a connection **1123**, permits coupling of the computer system **1100** to a local computer network (not shown), known as a Local Area Network (LAN). The local computer network may also couple to the wide network **1120** via a connection, which would typically include a so-called "firewall" device or similar functionality. The local network interface may be formed by an ETHERNET™ circuit card, a wireless BLUETOOTH™ or an IEEE 802.11 wireless arrangement.

The interfaces **1108** and **1113** may afford both serial and parallel connectivity, the former typically being implemented according to the Universal Serial Bus (USB) standards and having corresponding USB connectors (not illustrated). Storage devices **1109** are provided and typically include a hard disk drive (HDD) **1110**. Other devices such as a floppy disk drive **1111** and a magnetic tape drive (not illustrated) may also be used. An optical disk drive **1112** is typically provided to act as a non-volatile source of data. Portable memory devices, such as optical disks (e.g., CD-ROM, DVD), USB-RAM, and floppy disks, for example, may then be used as appropriate sources of data to the computer system **1100**.

The components **1105** to **1113** of the computer module **1101** typically communicate via an interconnected bus **1104** and in a manner which results in a conventional mode of operation of the computer system **1100** known to those in the relevant art. Examples of computers on which the described arrangements can be practiced include IBM-PC's and compatibles, Sun Sparcstations, APPLE MAC™ or alike computer systems evolved therefrom.

Typically, the application program(s) implementing the method **1000** are resident on the hard disk drive **1110** and read and controlled in execution by the processor **1105**. Intermediate storage of such programs and any data fetched from the networks **1120** and **1122** may be accomplished using the semiconductor memory **1106**, possibly in concert with the hard disk drive **1110**. In some instances, the application programs may be supplied to the user encoded on one or more CD-ROM and read via the corresponding drive **1112**, or alternatively may be read by the user from the networks **1120** or **1122**. Still further, the software can also be loaded into the computer system **1100** from other computer readable media. Computer readable media refers to any storage medium that participates in providing instructions and/or data to the computer system **1100** for execution and/or processing. Examples of such media include floppy disks, magnetic tape, CD-ROM, a hard disk drive, a ROM or integrated circuit, a magneto-optical disk, or a computer readable card such as a PCMCIA card and the like, whether or not such devices are internal or external of the computer module **1101**. Examples of computer readable transmission media that may also participate in the provision of instructions and/or data include radio or infra-red transmission channels as well as a network connection to another computer or networked device, and the Internet or Intranets including e-mail transmissions and information recorded on Web sites and the like.

The second part of the application programs and the corresponding code modules mentioned above may be executed to implement one or more graphical user interfaces (GUIs) to be rendered or otherwise represented upon the display **1114**. Through manipulation of the keyboard **1102** and the mouse **1103**, a user of the computer system **1100** and the application may manipulate the interface to provide controlling commands and/or input to the applications associated with the GUI(s).

22

The method **1000** may alternatively be implemented in dedicated hardware such as one or more integrated circuits performing the functions or sub functions of FIG. **10**. Such dedicated hardware may include graphic processors, digital signal processors, or one or more microprocessors and associated memories.

The method **1000** begins at step **1010**, where after receiving the first password entered by the user **101**, the method **1000** proceeds to step **1011**. At step **1011**, the password is transmitted by the processor **1105** to the server **1150** hosting the payments website. Then at the next step **1012**, the server **1150** verifies the password entered by the user **101** by generating another dynamic password and comparing the passwords. In order to generate the password, the server **1150** accesses a key (associated with the user **101** of the code module **130**) stored in a key database **1151** and determines the current time from a system clock **1152**. In the present example, the key database **1151** may be configured within a hard disk drive (not shown) of the server **1150**. The server **1150** generates the password using the key and the current time determined by encrypting a value representing the current time, using the RSA encryption algorithm, which is the same encryption algorithm used by the controller **107**. Also at step **1012**, the server **1150** determines available funds (i.e., \$156.56) by determining the amount from the password entered by the user **101**.

Once the dynamic password is entered into the computer module **1101** and verified by the server **1150**, the user **101** makes another request using the arrangement of FIG. **8** in order to select the amount of funds wishing to be debited from their account. The amount of funds selected by the user **101** is then debited from the value stored on the IC (e.g., **705A**) corresponding to their account. FIG. **12** shows a method **1200** of debiting an amount of funds from an account.

The method **1200** commences at step **1201**, where the controller **107** detects selection of another one of the control selectors **801** of the set. In the present example, the control selector **801** "2" of the set is selected. In response to selection of the selector "2," at the next step **1202**, the controller **107** prompts the user **101** to enter the amount that they wish to pay that also represents the amount to be debited from their account (i.e., their VISA® account).

At the next step **1203**, the controller **107** determines the amount wished to be paid based on an amount entered by the user **101** and displays this amount on the LCD display **802**. The user may enter the amount using the set of control selectors **801**. For example, the controller **107** may display a generic amount and the user may select control selector **801** "3" of the set to increase a displayed amount and "4" to decrease the displayed amount.

The next step **1204** is a testing step in which the biometric sensor **121** in the code entry module **130** checks whether a biometric signal **102** is being received. If this is not the case, then the method **1200** is directed in accordance with a NO arrow back to the step **1206** in a loop. If, on the other hand, the biometric signal **102** has been received, then the method **1200** is directed in accordance with a YES arrow to a step **1205**. The step **1205** compares the received biometric signal **102** with information in the biometric signature user ID database **105** in order to ensure that the biometric signal received is that of the rightful user **101**.

A subsequent testing step **1206** checks whether the comparison in the step **1205** yields the desired authentication. If the biometric signature matching is authenticated, then the method **1200** is directed in accordance with a YES arrow to a step **1207**. At step **1207**, the controller **107** generates a

23

second dynamic password, using the RSA encryption algorithm with the current time being used as the input value to the encryption process, as described above. The dynamic password is displayed on the LCD display **802**. In the present example, the dynamic password generated at step is “5 6 8 8 8 1 8 9.” Again, the second dynamic password is a time-dependent password. However, the second password may also be an event-synchronous password. The amount determined at step **1203** representing the amount of funds to be paid is also encrypted within the dynamic password. The method **1200** concludes at the next step **1208**, where the amount of funds entered by the user at step **1203** is deducted from the value stored on the IC **705A**.

In accordance with the present example, the second dynamic password generated and displayed by the controller **107** at step **1207** is entered into the computer module **1101** to complete the online payment to the business website.

Returning to FIG. **10**, at the next step **1013**, after receiving the second dynamic password entered by the user **101**, the method **1000** proceeds to step **1014**. At step **1014**, the second password is transmitted by the processor **1105** to the server **1150** hosting the payments website. Then at the next step **1015**, the server **1150** verifies the password entered by the user **101** by generating still another dynamic password and comparing the passwords as described above. In order to generate this still further password, the server **1150** accesses the key (associated with the user **101** of the code entry module **130**) stored in the key database **1151** and determines the current time from the system clock **1152**, as described above. Also at step **1015**, the server **1150** determines the amount to be paid by decrypting the amount from the second password entered by the user **101**.

The method **1000** concludes at the next step **1016**, where the payment is processed by the server **1150**. The payment transaction can be reconciled to the customer in a monthly statement.

Variations on the methods described above can also be used for secure access, for example, to gain entry to a building. For example, the dynamic password generated at step **907** may be entered into a keypad located on a door jamb and being connected to a building security system. In this instance, rather than representing an account balance, the stored value encrypted within the dynamic password can be a personal identification number (PIN) stored with the transmitter sub-system **116**. The building security system then verifies the password entered by the user **101** by generating another dynamic password and comparing the passwords. Thus, the PIN used for secure access is enhanced through the need of a biometric signature.

The dynamic passwords generated at step **907** may have other user information encrypted within the dynamic password including a serial number related to the transmitter sub-system (configured within a telephone or fob), time of access, type of account and validated finger (e.g., middle finger).

The arrangement of FIG. **8** comprises multiple selectable proximity modules (e.g., **806A**, **806B**) each configured in accordance with the arrangement of FIG. **7B**. In an alternative arrangement, one antenna (e.g., **707**) may be associated with multiple ICs (e.g., all connected in parallel with the antenna). Again, in this instance, each of the ICs may be separately selectable using separate control lines (e.g., **807A**, **807B**).

FIG. **13** shows how the secure access system of FIG. **2** can, using one or more conventional proximity modules, be used to perform a secure transaction. FIG. **13** shows the biometric module **103** of FIG. **2** together with the audio

24

transducer **124**, the LED indicators **122** and the biometric sensor **121**, and a set of control selectors **801** designated selectors 1-4 in the present example for selecting one or more control functions. The biometric module **103** also has an LCD display **802**. The arrangement **1300** also has a proximity module **1306**. The proximity module **1306** comprises the coil **129**, the capacitor **131** and an IC **1307**.

In the arrangement **1300** of FIG. **13**, the proximity module **1306** is configured to be constantly available to be activated, upon being placed within the field of the code entry module **130** in a conventional manner, without the need for a control signal such as the signal **803**. That is, no biometric verification is required in the arrangement **1300** in order to activate the proximity module **1306**.

The arrangement **1300** may also be used to perform secure transactions or the like, including an online transaction. Rather than the biometric verification being needed in order to activate the proximity module **1306**, the generation of a dynamic password, as described above, may be utilized to provide an additional security layer, as will be described below.

A method **1400** of performing a transaction using the arrangement **1300** of FIG. **13** will now be described with reference to FIG. **14**. The method **1400** begins with a testing step **1401** in which the biometric sensor **121** in the code entry module **130** checks whether a biometric signal **102** is being received. If this is not the case, then the method **1400** is directed in accordance with a NO arrow back to the step **1401** in a loop. If, on the other hand, the biometric signal **102** has been received, then the method **1400** is directed in accordance with a YES arrow to a step **1402**. The step **1402** compares the received biometric signal **102** with information in the user ID database **105** in order to ensure that the received biometric signal **102** is that of the rightful user **101**.

A subsequent testing step **1403** checks whether the comparison in the step **1402** yields the desired authentication. If the biometric signature matching is authenticated, then the method **1400** is directed in accordance with a YES arrow to a step **1404** where the match is indicated to the user **101** on the LCD display **802**. Also at step **1404**, the controller **107** detects selection of one of the control selectors **801** of the set. In the present example, the control selector **801** “1” of the set is selected by the user **101**. In response to selection of the selector “1,” at the next step **1405**, the controller **107** generates a dynamic password, using the RSA encryption algorithm, as described above, and displays the dynamic password on the LCD display **802**. The dynamic password is generated based on a card number (associated with the user) stored on the IC **1307**. In the present example, the dynamic password generated at **1405**, is entered into a keypad or the like (not shown) associated with the code entry module **130**. The card number may be encrypted within the dynamic password.

Then at the next step **1406**, upon the proximity module **1306** being placed within the field of the code entry module **130**, the coil **129** is excited and charges the capacitor **131**, which in turn energizes the IC **1307**. The IC **1307** then transmits signal **1332**, as depicted by an arrow, the card number stored within the IC **1307**, via the proximity module **1306**, to the code entry module **130**. A controller (e.g., **109**) associated with the code entry module **130** then uses the card number to verify the dynamic password as described above. In particular, the controller of the code entry module **130** generates a dynamic password, using the RSA encryption algorithm, using the card number, and compares the generated password to the password entered by the user **101**.

Again, the passwords generated at step 1405 and by the controller may be time-dependent or event-synchronous.

At the next step 1406, the proximity module 1306 receives a signal 1333, as depicted by the arrow, from the code entry module 130. Then at the next step 1407, the IC 1307 decrements the stored value by a predetermined amount. This predetermined amount may represent a payment for a trip on a bus, for example. In another alternative embodiment, the signal 1333 received from the code entry module 130 may include a value indicating an amount that needs to be decremented from the stored value in step 1407. In this instance, the IC 1307 decrements the stored value by the amount represented by the value received from the code entry module 130. Accordingly, the stored value is decremented by an amount (i.e., either predetermined or variable) depending on the information (such as the card number) contained in the secure access signal 132 and the proximity module 126 never has to leave the user's hand. Following step 1407, the method 1400 is then directed in accordance with an arrow 1408 back to the step 1401.

Accordingly, in the example of FIGS. 13 and 14, the dynamic password generated on the basis of a valid biometric reading, is used to verify the user of the arrangement 1300. Although in the example of FIGS. 13 and 14, the dynamic password was generated first, in alternative arrangements the dynamic password may follow or accompany a payment.

The arrangements described above, including the arrangement 1300 of FIG. 13, may also be used with automatic teller machines (ATMs) or point of sale (POS) devices where a personal identification number (PIN) has conventionally been used to verify the validity of a card (i.e., magnetic stripe card or smart card) owner. The dynamic password generated on the basis of a valid biometric reading may be used to replace such a PIN, without affecting a conventional transaction. For example, in the case of an ATM transaction or electronic funds transfer point of sale (EFTPOS) transaction, a user inserts their magnetic stripe card (or smart card) into the ATM or swipes the card using an EFTPOS terminal. A card number corresponding to the magnetic stripe card is stored on the IC 1307. At the same time as inserting or swiping their card, the user may use the arrangement 1300 described above to generate a time-dependent or event-synchronous dynamic password based on a valid biometric reading. Again, the card number corresponding to the magnetic stripe card may be encrypted within the generated password. The user then enters the generated dynamic password into the ATM or EFTPOS terminal. The dynamic password is then verified by a back-end host server (e.g., associated with a bank) in the manner described above based on the card number.

The arrangements described above, including the arrangement 1300 of FIG. 13, may also be used for making an online payment. Again, the dynamic password may be used to replace the user's password that has conventionally been used. At the same time as logging into a banking website, for example, the user may use the arrangement 1300 described above to generate a time-dependent or event-synchronous dynamic password based on a valid biometric reading. Again, a user identification number corresponding to the user may be encrypted within the generated password. The user then enters the generated dynamic password into a personal computer. The dynamic password is then verified by a back-end host server (e.g., associated with a bank) connected to the personal computer in the manner described above based on the user's identification number encrypted with the entered password.

The arrangements described above, including the arrangement 1300 of FIG. 13 may stop intruders from stealing credit and debit cards for later fraudulent use in ATM and POS devices. The owner or user of a magnetic stripe card would also require the fob or mobile telephone with the card number corresponding to the magnetic stripe card stored thereon. A new dynamic password could then be generated for each ATM or EFTPOS transaction. The dynamic password overcomes the inherent weaknesses in PIN type inputs, due to the dynamic nature of the password and requirement to validate the owner or user biometrics prior to generating that password. If an intruder views a dynamic password input, they cannot replicate it a next time as the password is constantly changing.

Although the arrangement 1300 of FIG. 13 has been described as including the proximity module 1306, the arrangement 1300 may not necessarily include such proximity module 1306. An arrangement without a proximity module may also be used to perform the transactions described above including ATM, EFTPOS and online transactions merely by generating a dynamic password as described above.

The arrangements described above allow biometric security to be easily integrated with existing infrastructure for payment or access systems. The arrangements are simple and effective for secure proof of identity. The user does not need to remember a code, number, name or combination. The arrangements may be used online or offline. The described arrangements may also be used in wireless systems, alarm panel activation, garage control, door access, boom-gate access and anywhere long distance secure transmissions are required.

INDUSTRIAL APPLICABILITY

It is apparent from the above that the arrangements described are applicable to the security industry.

The foregoing describes only some embodiments of the present disclosure, and modifications and/or changes can be made thereto without departing from the scope and spirit of the present disclosure, the embodiments being illustrative and not restrictive.

The system 100 can also be used to provide authorized access to lighting systems, building control devices, exterior or remote devices such as air compressors and so on. The system 100 may also be used to gain access to online applications. For example, as described above, the transmitter sub-system 116 may be used to generate a one-time dynamic password for use in online banking applications or the like. The concept of "secure access" is thus extendible beyond mere access to restricted physical areas.

Although the present specification has described communication between the transmitter sub-system 116 and the receiver sub-system being performed using RF, other communication modes such as capacitive coupling or infra-red could also be used.

The arrangements described above may comprise a "duress" or "alarm" feature. This feature may be activated using a different predetermined biometrics. For example, typically the user may present a particular finger (e.g., their thumb) for verification prior to enabling the proximity module (e.g., 126) or generating a dynamic password. If the valid user is under duress by an intruder, the valid user can use an alternate finger (e.g., their index finger) to enable the proximity module and/or generate a dynamic password, for example. Use of the alternate finger may automatically activate an alarm, thereby bringing emergency services to

the situation. Alternatively, the dynamic password generated based on the alternate finger may include an encrypted alarm notification. In this instance, when the generated password is entered into a keypad, keyboard or the like, an alarm will be automatically activated by a backend controller or server, again bringing the emergency services to the location.

Generating different dynamic passwords based on the verification of different biometrics may also be used where multiple access areas are selectable from a single point. For example, the arrangements described above (e.g., the arrangement 1300) may be configured so that a user's thumb may be read and verified, as described above, in order to generate a first dynamic password. The first password may be entered into a keypad, for example, to allow the user to enter a first door "1." The user may then present a different finger (e.g., the person's index finger), which, once verified, may result in the generation of a second dynamic password. The second password may be entered into a keypad, for example, to allow the user to enter a second door "2."

What is claimed is:

1. A device configured to transmit a secure signal to a system for performing a secure transaction, the device comprising: a biometric sensor;
a display;
a selector through which a user input is received;
at least one proximity circuit; and
a controller which is operated to:
receive, via the biometric sensor, input of a biometric signal;
perform a matching process, thereby to match received biometric data extracted from the received biometric signal with stored biometric data from a biometric signature contained in memory of the device, wherein a database of biometric signatures is maintained in memory of the device, and wherein the biometric sensor of the device was used to enroll the biometric signature contained in the memory of the device;
present data representative of a plurality of financial accounts on the display;
receive, via the selector, user input indicative of a selected financial account selected from the plurality of financial accounts presented;
present, via the display, feedback indicating the selected financial account; and
generate data including a serial number unique to the device and a unique dynamic code for the secure transaction, wherein the unique dynamic code is unique for the secure transaction, and cause the at least one proximity circuit to transmit a secure signal conveying the generated data to the system when the proximity circuit is placed within range of a radio frequency field emitted by the system;
wherein the system is configured to, in response to receipt of the secure signal, communicate with a back-end host server thereby to perform the secure transaction, including transmission of the generated data including the serial number unique to the device and the unique dynamic code for the transaction;
wherein the secure transaction is performed based on verification of the secure transaction data including the serial number unique to the device and the unique dynamic code by the back-end host server, wherein the unique dynamic code is unique for each transaction.

2. The device according to claim 1, wherein the biometric sensor is configured to receive a biometric signal in one of the following forms: fingerprint, face pattern, retinal pattern, iris pattern, face pattern, and palm configuration.

3. The device of claim 1, wherein the proximity circuit is further configured to unlock an automobile.

4. The device of claim 1, further comprising at least one light emitting diode (LED).

5. The device of claim 1, further comprising a second proximity circuit including at least one coil.

6. The device of claim 5, wherein said second proximity circuit further comprises an inductor and a capacitor.

7. The device of claim 1, wherein said first proximity circuit is configured to activate an automobile engine.

8. The device of claim 1, wherein said biometric sensor is further configured to allow the user to gain access to an application.

9. The device of claim 1, further comprising a processor configured to generate passwords for use by the user.

10. The device of claim 1, wherein said back-end host server identifies a number of a financial accounts associated with the user.

11. The device of claim 1, wherein said dynamic code comprises an event-synchronous token.

12. The device of claim 1, wherein said second proximity circuit is configured to communicate with a magnetic stripe card reader.

13. The device of claim 1, further comprising at least infrared emitter.

14. The device of claim 1, wherein the at least one proximity circuit is configured to provide functionality of a plurality of distinct proximity circuits corresponding to respective financial accounts.

15. A method for operating a device to transmit a secure signal to a system for performing a secure transaction, the device having at least one proximity circuit, the method including:

receiving, via a biometric sensor provided by the device, input of a biometric signal;

performing a matching process, thereby to match received biometric data extracted from the received biometric signal with stored biometric data from a biometric signature contained in memory of the device, wherein a database of biometric signatures is maintained in the memory of the device, and wherein the biometric sensor of the device was used to enroll the biometric signature contained in the memory of the device;

presenting data representative of a plurality of financial accounts on a display of the device;

receiving, via a selector, user input indicative of a selected financial account selected from the plurality of financial accounts presented;

presenting, via the display, feedback indicating the selected financial account; and

generating data including a serial number unique to the device and a unique dynamic code for a transaction, wherein the unique dynamic code is unique for the transaction, and causing the at least one proximity circuit to transmit a secure signal conveying the generated data to the system when the at least one proximity circuit is placed within range of a radio frequency field emitted by the system;

wherein the system is configured to, in response to receipt of the secure signal, communicate with a back-end host server thereby to perform the secure transaction, including transmission of the generated data including the serial number unique to the device and the unique dynamic code for the transaction;

wherein the secure transaction is performed based on verification of transaction data including the serial number unique to the device and the unique dynamic

code by the back-end host server, wherein the unique dynamic code is unique for each transaction.

16. The method of claim 15, wherein the biometric sensor is configured to receive a biometric signal in one of the following forms: retinal pattern, iris pattern, face pattern, 5 and palm configuration.

17. The method of claim 15, wherein the proximity circuit is further configured to unlock an automobile.

18. The method of claim 15, wherein the proximity circuit is further configured to activate an automobile engine. 10

19. The method of claim 15, wherein said biometric sensor is further configured to allow the user to gain access to an application.

20. The method of claim 15, wherein said dynamic code comprises an event-synchronous token. 15

21. The method of claim 15, wherein said encrypted information identifying the financial account associated with the user comprises a token generated by the device.

* * * * *